



Order no.: 500100

## Single-flight vertical ladder with back protection anodised aluminium

Climbing height [mm]

4760	5600	6440	7280	8400	9520
------	------	------	------	------	------

### Specification

Climbing height <b>4.76 m</b>	Ladder length incl. exit side-rail <b>5.96 m</b>	Outer width <b>520 mm</b>	Depth of side-rails <b>60 mm</b>	Max. load capacity <b>150 kg</b>
Wall distance <b>200 mm</b>	Design type <b>Single-flight</b>	Material <b>Anodised aluminium</b>	Weight <b>29 kg</b>	Business division <b>MUNK Günzburger Steigtechnik</b>
Article no. <b>500100</b>	Price <b>€ 1,350.00</b>			

### Facts

- Single-flight vertical ladders according to DIN 18799-1/-3, DIN 14094-1 and DIN EN ISO 14122-4: Additional components, such as exit steps, railing and safety doors, may be required depending on the exit situation on site. These components are not included as a complete kit and need to be ordered separately.
- Irrespective of the climbing height:

- Either back protection or safety railing can be used as fall protection (combination not permitted as the rescue of persons is then hindered by the back protection)
- The need for an occupational medical examination for suitability for working at height (e.g. G 41) depends on the risk assessment (e.g. total climbing height, type of safety railing) of the respective vertical ladder systems
- Proof of the load-bearing capacity of the underlying surface must be provided for each construction project by a responsible stability expert
- The vertical overlap of successive ladder flights must be at least 1,680 mm
- At unsecured exit points, railings attached to both sides of the vertical ladder or led into the exit level are required
- Gap at exit step must not be larger than 75 mm
- Step-on dimension: Distance from entry level to the first rung 100–400 mm
- When exiting forwards, the uppermost rung must be at the height of the exit side-rail
- Vertical ladders with fall protection require at least 800 × 800 mm clear space available in front of the ladder when climbing off it. These dimensions must also be observed for new installations in the existing system
- These dimensions should also be complied with for new installations in the existing system
- The clearances between the vertical ladder system and the railing must not exceed 180 mm
- The connection to the fall protection must be established and released from a secured standing position

- For safe gripping of the side-rails, the clearance to adjacent parts around the side-rails must be at least 75 mm (except for components forming part of the vertical ladder system)

### Scope of supply

- Ladder section anodised aluminium: 1 x
- Ladder section anodised aluminium: 1 x
- Exit side-rail straight: 2 x
- Rigid wall anchor 200 mm, galvanised steel: 6 x
- Ø 700 mm back protection hoop: 3 x
- Back protection hoop strut, 3,000mm long: 5 x
- Vertical ladder connector 200 mm: 2 x

### Information on sustainability criteria

- Corporate certification: ISO 9001
- Corporate certification: EN 1090
- Corporate certification: EcoVadis
- RoHS
- REACH
- The MUNK Group complies with a Code of Conduct
- The Supply Chain Act does not apply due to our size
- The materials used are listed in the technical specification
- Resource-saving production: own photovoltaic systems
- Energy-efficient consumption during production: LED lighting
- Repairability, durability and quality: 15-year warranty on series products made in Germany
- Recyclability: Our products are mostly made of aluminium, steel or wood and can be fed directly into the recycling process.
- Socially acceptable working conditions in production: fair wages, gender equality
- Economical and recyclable packaging: no use of polystyrene, predominantly use of wood and cardboard, small amounts of plastic
- No health hazards for the users

## More product pictures

---



## Added value

---

### Rational modular principle

- Prefabricated vertical ladders and the possibility of combining them yourself offer the right solution for every project
- The highly stable fastening technology of the important back protection increases the economic efficiency
- Each individual component in the modular kit system meets the same quality and efficiency requirements



### Various material versions

- Depending on the application, vertical ladders made of galvanised steel, stainless steel, aluminium and anodised aluminium are available
- Wall anchors and other mounting materials are available in several materials
- Robust, durable, efficient



### Mounting and fastening

- Thanks to the optimised assembly system, even complex and multiple-flight systems can be assembled with up to 30 percent time savings
- For ready-made vertical ladders, the appropriate mounting sets are already included, the modular kit system offers numerous fastening options (please also order)
- Adjustable wall anchors for complex façades or walls with full thermal insulation



### Safely to your destination

- Convenient platforms for rest breaks or easy changeover with staggered vertical ladders
- Exits and access ladders for safe ascent and descent
- Lockable doors, wall anchors and other accessories for different structural conditions



## Optimum planning

- Practical planning aids (available as [Downloads](#)) with tips for correct planning of vertical ladder systems
- Planning in close coordination with the client as well as the place and purpose of use
- Joint project planning



All [fixed ladders / vertical ladders](#) at a glance:

- [Single-flight vertical ladders](#) in accordance with DIN 18799-1/-3, DIN 14094-1 and DIN EN ISO 14122-4 (depending on the choice of standard and the situation on site at the exit, additional components such as exit steps, railings and safety doors may be required)
- DIN 18799-1: Stationary multiple-flight vertical ladders [on buildings](#)
- DIN 14094-1: Multiple-flight [emergency ladder systems \(emergency ladders\)](#).
- DIN EN ISO 14122-4: Stationary multiple-flight vertical ladders [on machinery](#)

## Accessories



Order no.: 063502

Safety doors  
without fall  
protection rail



Order no.: 063500

Safety barrier



Order no.: 062966

Exit step bright  
aluminium



Order no.: 062967

Exit step bright  
aluminium



Order no.: 062968

Exit step bright  
aluminium



Order no.: 062969

Exit step bright  
aluminium



Order no.: 062970

Exit step bright  
aluminium



Order no.: 063966

Exit step  
galvanised steel



Order no.: 063967

Exit step  
galvanised steel



Order no.: 063968

Exit step  
galvanised steel



Order no.: 063969

Exit step  
galvanised steel



Order no.: 063970

Exit step  
galvanised steel



Order no.: 068966

Exit step stainless  
steel

















Order no.: 068967

Exit step stainless  
steel




Order no.: 068968

Exit step stainless  
steel

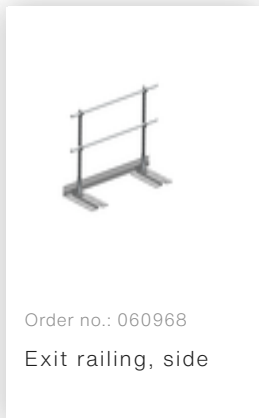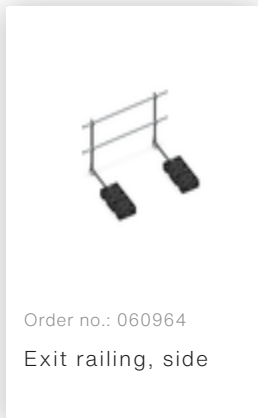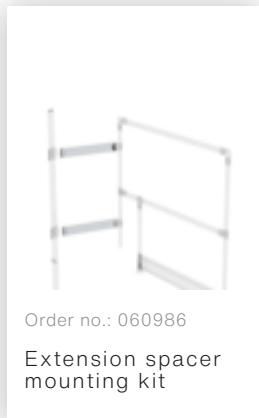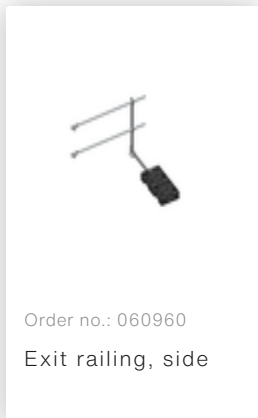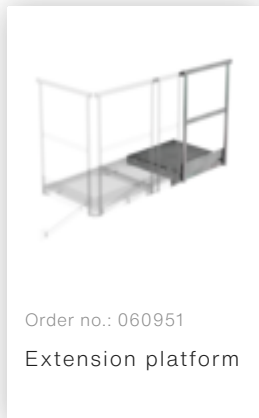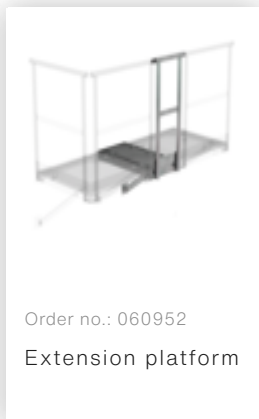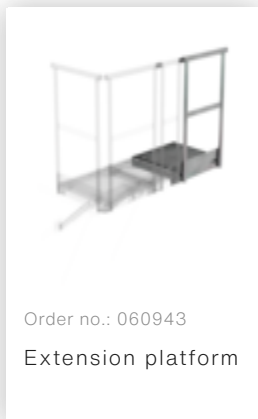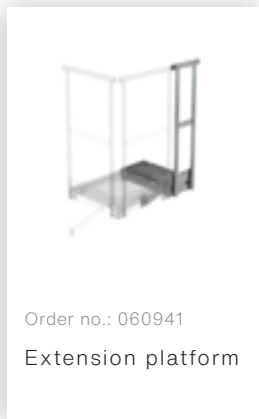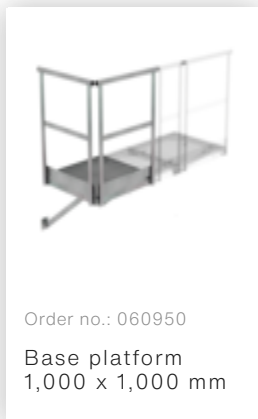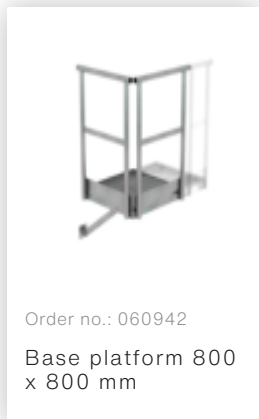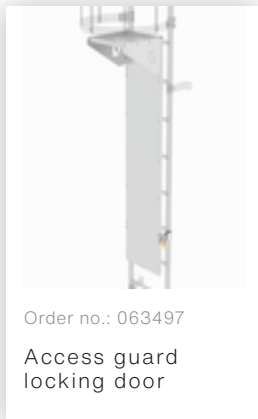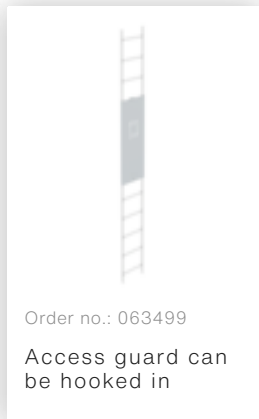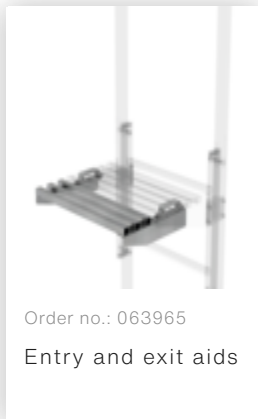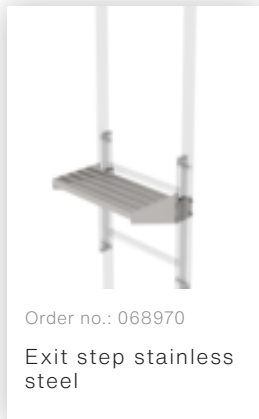







Order no.: 063253

Ground attachment for base plate




Order no.: 068253

Ground attachment for base plate




Order no.: 063278

Wall anchor




Order no.: 063962

Rotating access protection unit




Order no.: 061445

Access protection access ladder




Order no.: 019007

Identification plate for fall protection device




Order no.: 019107

Identification sticker for fall protection device




Order no.: 019175

Inspection sticker



Order no.: 019176








Inventory sticker



Order no.: 063496

Access guarding - end door for climbing protection

## Spare parts

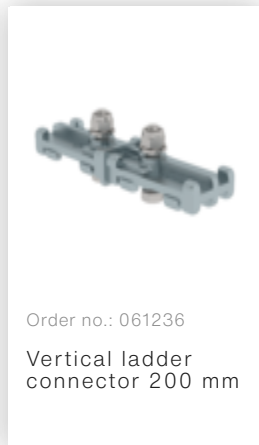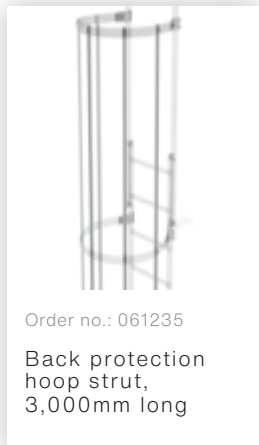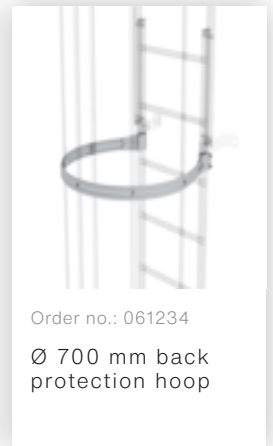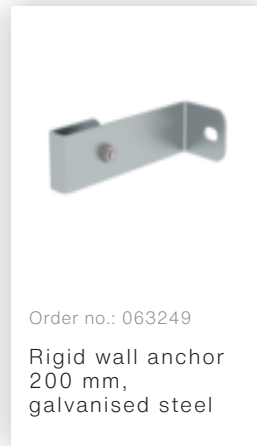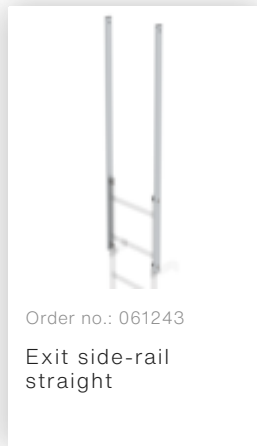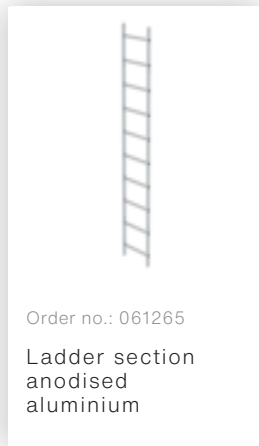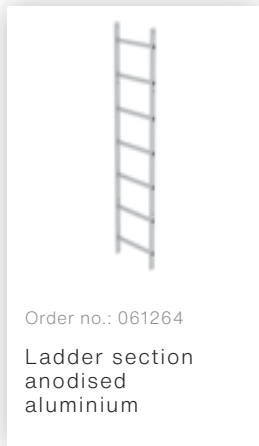

## Corporate certifications

---

on sustainability criteria

