

Order no.: 155348

## Mobile scaffolding, 0.75 × 2.45 m, with outrigger.



Platform height [mm]

3070	4470	5590	6430	7550	8390
9510	10350				

### Specification

Working height <b>5.07 m</b>	Scaffolding height <b>5.74 m</b>	Platform height <b>3.07 m</b>	Platform width <b>750 mm</b>	Platform length <b>2.45 m</b>
Load capacity <b>2 kN/m<sup>2</sup></b>	Weight <b>122 kg</b>	Indoor use, central installation <b>possible &amp; allowed</b>	Indoor use, lateral installation <b>possible &amp; allowed</b>	Outdoor use, central installation <b>possible &amp; allowed</b>
Outdoor use, lateral installation <b>possible &amp; allowed</b>	Ballasting of scaffolding, indoor, central installation <b>0 kg</b>	Ballasting of scaffolding, indoor, lateral installation <b>0 kg</b>	Ballasting of scaffolding, outdoor, central installation <b>0 kg</b>	Ballasting of scaffolding, outdoor, lateral installation <b>170 kg</b>
Predecessor product <b>155346, 178335</b>	Business division <b>MUNK Günzburger Steigtechnik</b>	Article no. <b>155348</b>	Price <b>€ 3,815.00</b>	Notice <b>Accessories necessary to fulfil DIN EN 1004-1:2021</b>

### Facts

- Mobile scaffolding made of sturdy round aluminium tubing with welded frame parts
- Modular kit principle for flexible use: All scaffolding parts can also be ordered individually as spare or extension parts

- Four Ø 200 mm swivel castors with centric load application, locking mechanisms and spindles
- Aluminium toe boards and railing frames with integrated knee board as safety railing
- Can be set up and dismantled without tools thanks to push-fit connections and quick-release fasteners
- Easy to handle thanks to individual lightweight parts
- Different platform lengths available (1.80 / 2.45 / 3.0 m)
- Working heights up to 12.4 m
- GS tested in accordance with DIN EN 1004
- Load class/scaffolding group 3: 2.0 kN/m<sup>2</sup>

### Scope of supply

- Push-fit frame, 0.75 m.: 2 x
- Push-fit frame, 0.75 m.: 2 x
- Railing lengthwise: 2 x
- Platform with trapdoor: 1 x
- Toe board front side: 2 x
- Toe board long side: 2 x
- Diagonal brace: 2 x
- Horizontal strut: 2 x
- Triangular outrigger: 4 x
- Swivel castor with spindle: 4 x
- Step-on bracket: 1 x
- Push-fit frame, 0.75 m.: 2 x

### Information on sustainability criteria

- Corporate certification: ISO 9001
- Corporate certification: EN 1090
- Corporate certification: EcoVadis
- RoHS
- REACH
- The MUNK Group complies with a Code of Conduct
- The Supply Chain Act does not apply due to our size
- The materials used are listed in the technical specification

- Resource-saving production: own photovoltaic systems
- Energy-efficient consumption during production: LED lighting
- Repairability, durability and quality: 15-year warranty on series products made in Germany
- Recyclability: Our products are mostly made of aluminium, steel or wood and can be fed directly into the recycling process.
- Socially acceptable working conditions in production: fair wages, gender equality
- Economical and recyclable packaging: no use of polystyrene, predominantly use of wood and cardboard, small amounts of plastic
- No health hazards for the users

## More product pictures

---



## Added value

---

### Safety at heights

- Optional protective assembly railing as safety railing during installation and removal
- Installation without the need of tools, uncomplicated and easy to handle
- Railing with integrated knee board and aluminium toe boards



### Highest quality

- User-friendly and robust design
- Low weight of the individual parts for easy handling
- Welded round tube frames for maximum stability
- All-round profiled rungs for safe ascent and descent



### Modular kit system

- More than 180 variants are possible by combining different individual parts
- Flexible adaptations and extensions possible at any time
- Individual parts at the original part price
- Installation and removal without tools



### Safe standing

- Adjustable outriggers with swing base or chassis bar ensure safe working depending on model
- Easy to handle
- Additional ballast weights required depending on application



### Sturdy connection

- Automatically closing scaffolding claw with sophisticated geometry for a secure connection
- Innovative spring clip for plug-on frame – no accidental loosening or losing possible
- Transverse and diagonal braces for high stability



### Flexible basis

- Swivel castors with load centring in braked condition
- Height adjustment for level compensation
- Various sizes and designs


















### Everything at a glance

- Clip tray for clearly visible attachment of the necessary test documents to the scaffolding
- Weather and UV-resistant




## Accessories

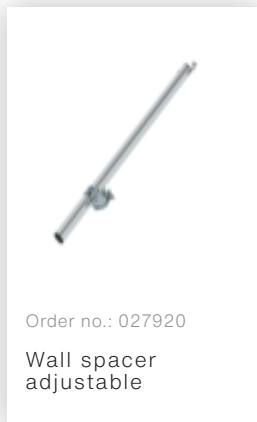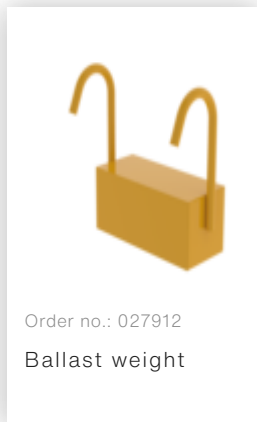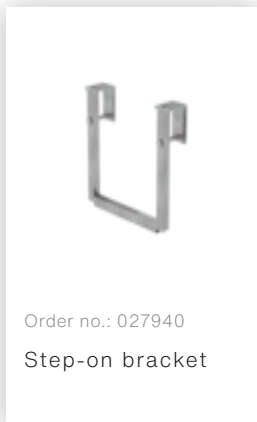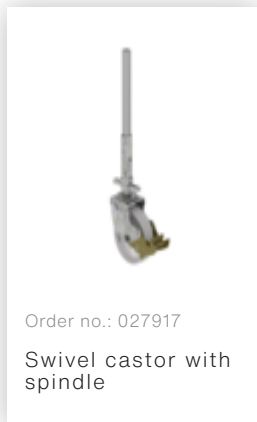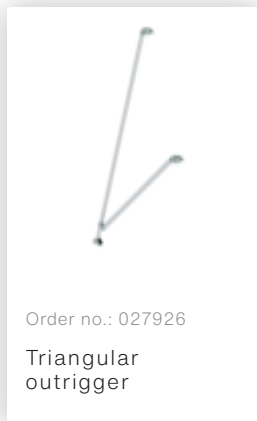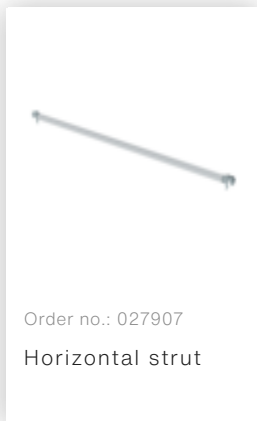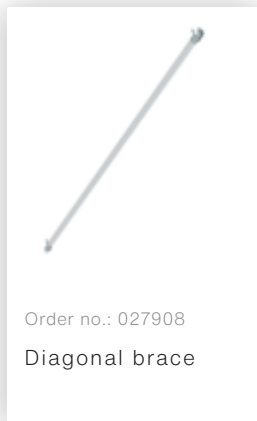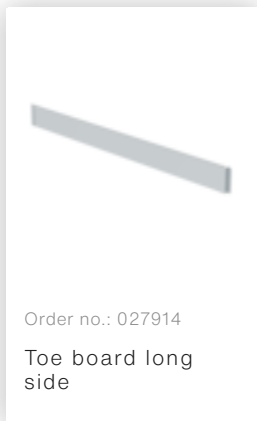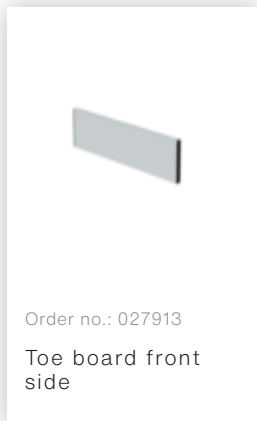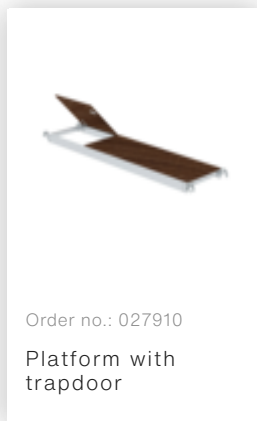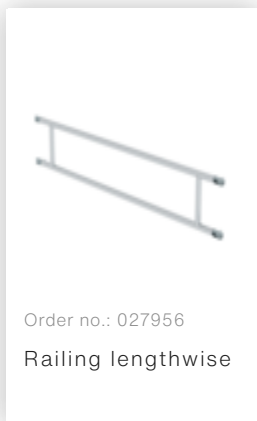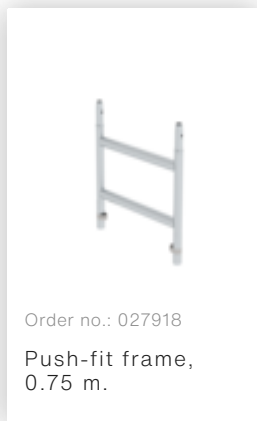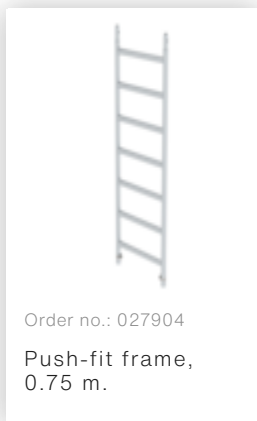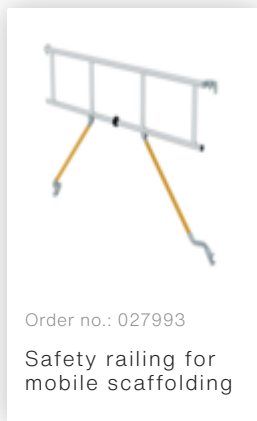





Order no.: 070506  
Frame extension  
can be clamped on




Order no.: 019274  
Storage tray 500 x  
220 mm




Order no.: 019276  
Storage tray 800 x  
300 mm




Order no.: 019175  
Inspection sticker




Order no.: 019176  
Inventory sticker




Order no.: 070507  
Safety door on  
front side




Order no.: 070505  
Scaffolding  
connector set




Order no.: 019136  
Spring clip for  
mobile scaffolding




Order no.: 019137  
Spring clip for  
mobile scaffolding




Order no.: 070520  
Scaffolding strut  
telescopic




Order no.: 027104  
Height-adjustable  
spindle




Order no.: 027922  
Swivel castor with  
spindle, non-  
marking grey



Order no.: 027921  
Swivel castor with  
spindle,  
electrically  
conductive



Order no.: 027958  
Swivel castor



Order no.: 027905  
Push-fit frame,  
0.75 m.

## Corporate certifications

---

on sustainability criteria

