

Order no.: 930200

M5 slot nut 6 mm slot

Type


M5-6

M6-6

M5-8

M6-8

M8-8

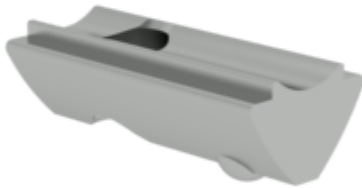

Specification

Material Galvanised steel	Weight/piece 5 g	Groove size 6 mm	ISO thread M5	Dimension A 17 mm
Dimension B 10 mm	Dimension C 7.9 mm	Order no. 930200		

Facts

- High-strength steel slot nuts
- For assembling profiles, construction parts and accessories in a range of positions
- Particularly suitable for exposure to dynamic stresses
- Slot nuts are swivelled into the side of the profile slot or inserted into the front

Description

Our steel slot nuts are particularly suitable for exposure to dynamic stresses and can be installed in different positions. Slot nuts are swivelled into the side of the profile slot or inserted into the front. Versions to fit all slot sizes of our construction profiles are available.

Scope of supply

- Slot nut: 1 x

Information on sustainability criteria

- Corporate certification: ISO 9001
- Corporate certification: ISO 14001
- Corporate certification: EN 1090
- Corporate certification: EcoVadis
- RoHS
- REACH
- The MUNK Group complies with a Code of Conduct
- The Supply Chain Act does not apply due to our size
- The materials used are listed in the technical specification
- Resource-saving production: own photovoltaic systems
- Energy-efficient consumption during production: LED lighting
- Repairability, durability and quality: 15-year warranty on series products made in Germany
- Recyclability: Our products are mostly made of aluminium, steel or wood and can be fed directly into the recycling process.
- Socially acceptable working conditions in production: fair wages, gender equality
- Economical and recyclable packaging: no use of polystyrene, predominantly use of wood and cardboard, small amounts of plastic
- No health hazards for the users

More product pictures

Corporate certifications

on sustainability criteria



Management System
ISO 9001:2015
ISO 14001:2015
www.tuv.com
ID 9108612548



Nachhaltigkeit
EcoVadis
sustainable supply management
CSR-Rating in Silber 2022

