


Order no.: 169439

## Mobile scaffolding SG 1.35 x 3 m with outrigger & double platform

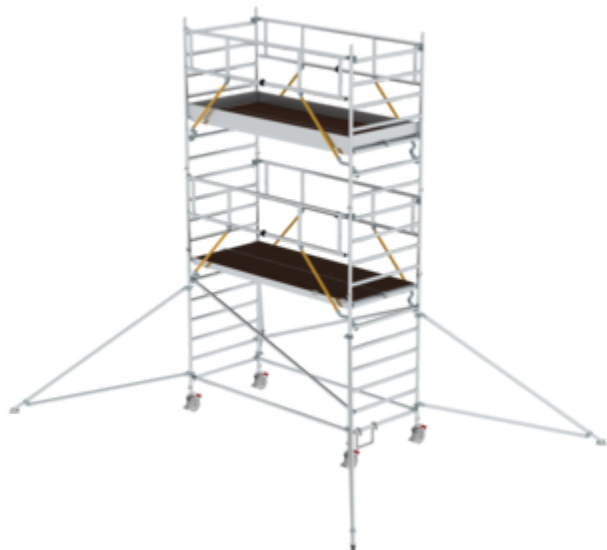

Platform height [mm]

4470	5590	6430	7550	8390	9510
10350	11470				

### Specification

Working height <b>6.47 m</b>	Scaffolding height <b>5.74 m</b>	Platform height <b>4.47 m</b>	Platform width <b>1.35 m</b>	Platform length <b>3 m</b>
Load capacity <b>2 kN/m<sup>2</sup></b>	Weight <b>265 kg</b>	Transport dimensions <b>3100 x 1400 x 800 mm, 260 kg</b>	Indoor use, central installation <b>possible &amp; allowed</b>	Indoor use, lateral installation <b>possible &amp; allowed</b>
Outdoor use, central installation <b>possible &amp; allowed</b>	Outdoor use, lateral installation <b>possible &amp; allowed</b>	Ballasting of scaffolding, indoor, central installation <b>0 kg</b>	Ballasting of scaffolding, indoor, lateral installation <b>0 kg</b>	Ballasting of scaffolding, outdoor, central installation <b>0 kg</b>
Ballasting of scaffolding, outdoor, lateral installation <b>0 kg</b>	Business division <b>MUNK Günzburger Steigtechnik</b>	Article no. <b>169439</b>	Price <b>€ 7,514.00</b>	

### Facts

- Mobile scaffolding made of sturdy round aluminium tubing with welded frame parts
- Secured all around thanks to leading railing, can be assembled and dismantled from level to level
- All scaffolding parts are also available individually as spare or extension parts

- Stable and flexible thanks to folding outriggers
- Also ideal for wall mounting or moving in narrow aisles
- Four Ø 200 mm swivel castors with centric load application, locking mechanisms and spindles
- Large-format work area in width of 1.35 m
- Aluminium toe boards and railing frames with integrated knee board as safety railing
- Can be set up and dismantled without tools thanks to push-fit connections and quick-release fasteners
- Easy to handle thanks to individual lightweight parts
- Different platform lengths available (1.80 / 2.45 / 3.0 m)
- Working heights up to 13.47 m
- GS-tested as per DIN EN 1004
- Load class/scaffolding group 3: 2.0 kN/m<sup>2</sup>

### Scope of supply

- Push-fit frame, 1.35 m.: 4 x
- Safety railing for mobile scaffolding: 4 x
- Platform with trapdoor: 2 x
- Platform without flap: 2 x
- Toe board front side: 2 x
- Toe board long side: 2 x
- Diagonal brace: 2 x
- Horizontal strut: 2 x
- Triangular outrigger: 4 x
- Swivel castor with spindle: 4 x
- Step-on bracket: 1 x
- Instructions for assembly and use EN 1004-2 - de: 1 x
- Push-fit frame, 1.35 m.: 2 x

### Information on sustainability criteria

- Corporate certification: ISO 9001
- Corporate certification: EN 1090

- Corporate certification: EcoVadis
- RoHS
- REACH
- The MUNK Group complies with a Code of Conduct
- The Supply Chain Act does not apply due to our size
- The materials used are listed in the technical specification
- Resource-saving production: own photovoltaic systems
- Energy-efficient consumption during production: LED lighting
- Repairability, durability and quality: 15-year warranty on series products made in Germany
- Recyclability: Our products are mostly made of aluminium, steel or wood and can be fed directly into the recycling process.
- Socially acceptable working conditions in production: fair wages, gender equality
- Economical and recyclable packaging: no use of polystyrene, predominantly use of wood and cardboard, small amounts of plastic
- No health hazards for the users

## More product pictures

---



## Added value

---

### Safety at heights

- Optional protective assembly railing as safety railing during installation and removal
- Installation without the need of tools, uncomplicated and easy to handle
- Railing with integrated knee board and aluminium toe boards



### Highest quality

- User-friendly and robust design
- Low weight of the individual parts for easy handling
- Welded round tube frames for maximum stability
- All-round profiled rungs for safe ascent and descent



### Modular kit system

- More than 180 variants are possible by combining different individual parts
- Flexible adaptations and extensions possible at any time
- Individual parts at the original part price
- Installation and removal without tools



### Safe standing

- Adjustable outriggers with swing base or chassis bar ensure safe working depending on model
- Easy to handle
- Additional ballast weights required depending on application



### Sturdy connection

- Automatically closing scaffolding claw with sophisticated geometry for a secure connection
- Innovative spring clip for plug-on frame – no accidental loosening or losing possible
- Transverse and diagonal braces for high stability



### Flexible basis

- Swivel castors with load centring in braked condition
- Height adjustment for level compensation
- Various sizes and designs






























### Everything at a glance

- Clip tray for clearly visible attachment of the necessary test documents to the scaffolding
- Weather and UV-resistant



## Accessories

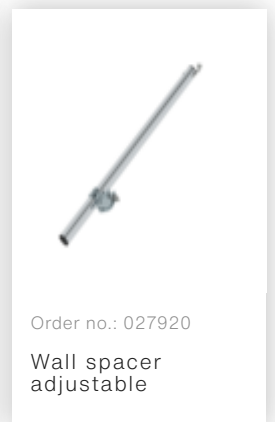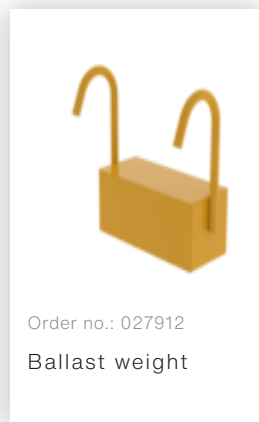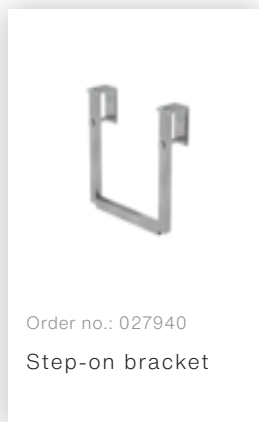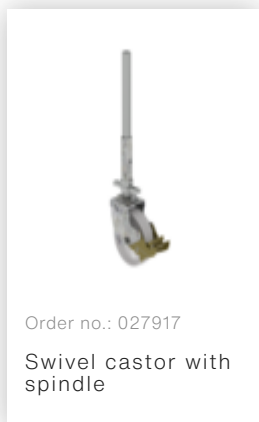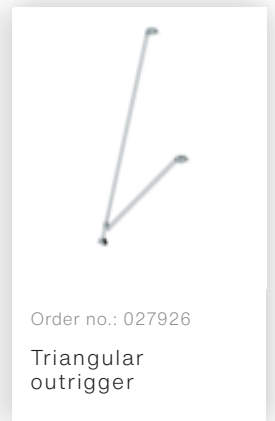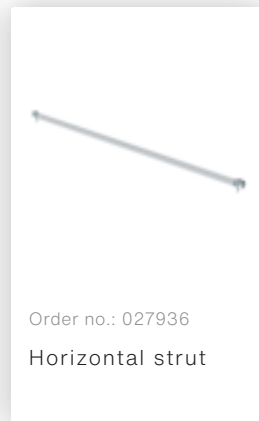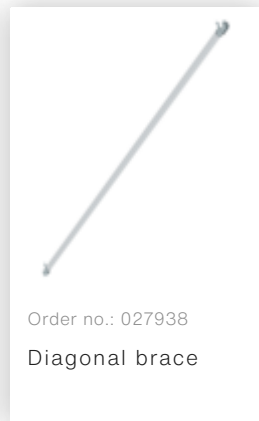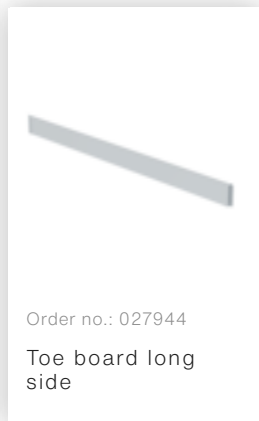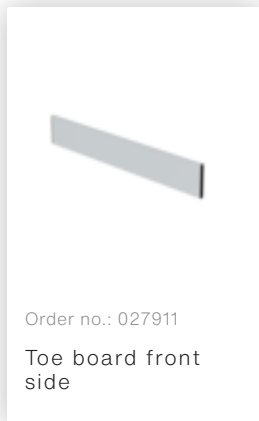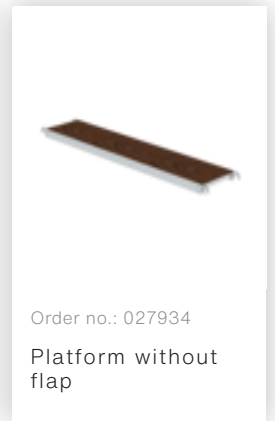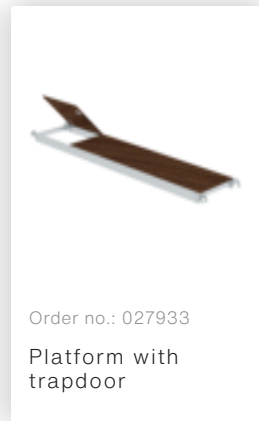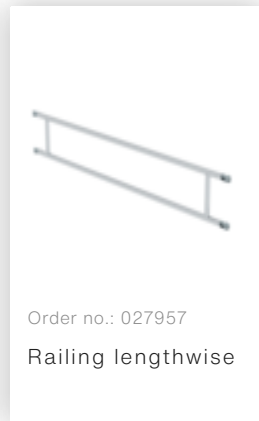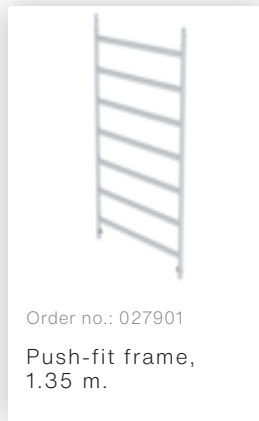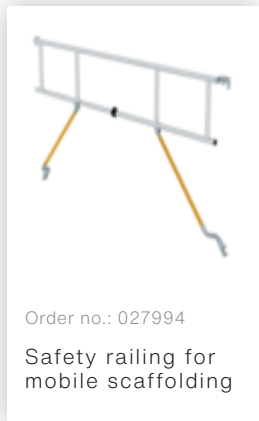

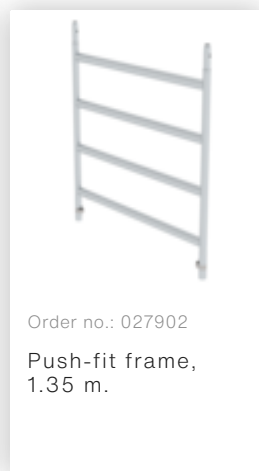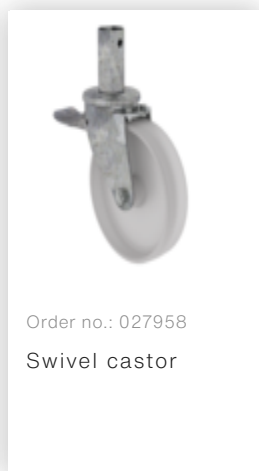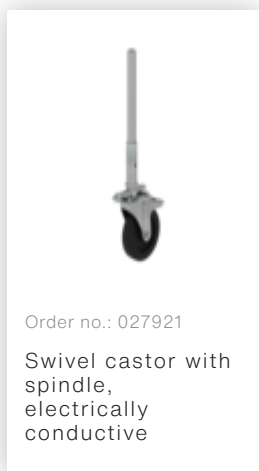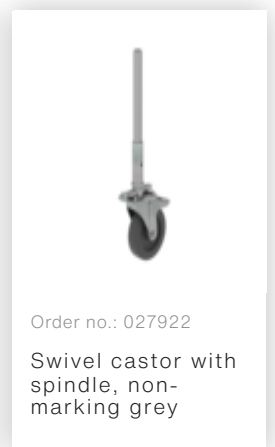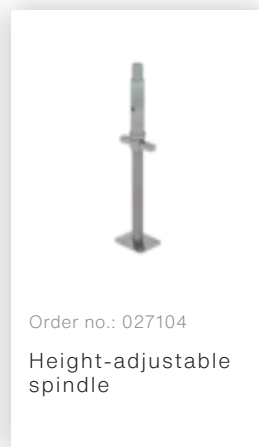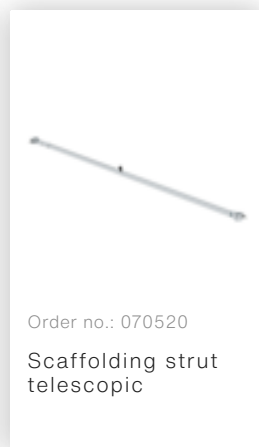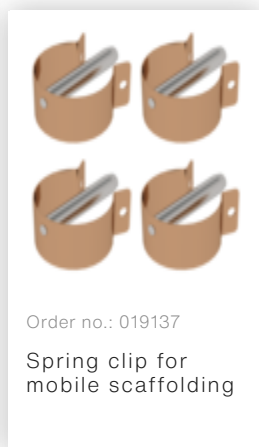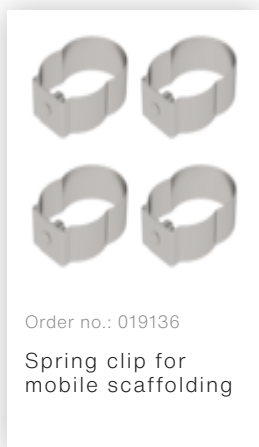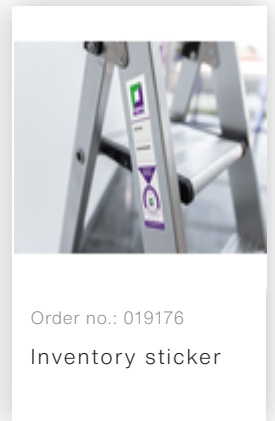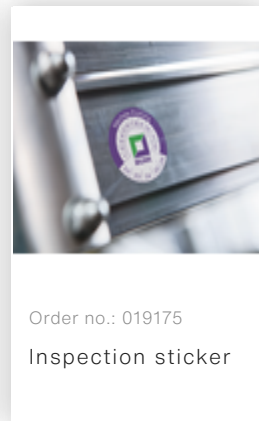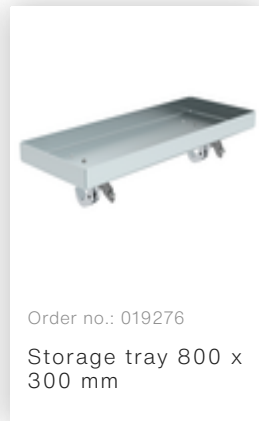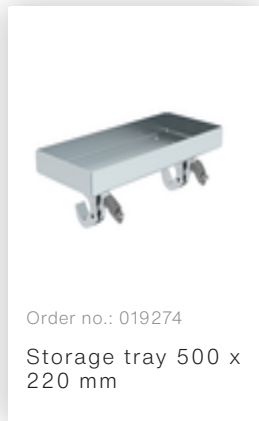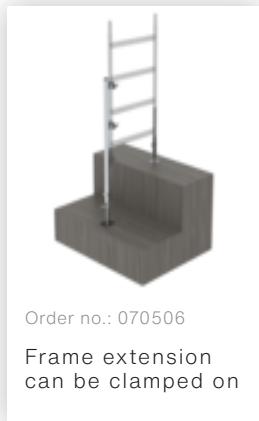

## Corporate certifications

---

on sustainability criteria

