


Order no.: 167211

## Mobile scaffolding SG 1.35 × 2.45 m with inclined ascents & outrigger

Platform height [mm]

4470 6430 8390 10350

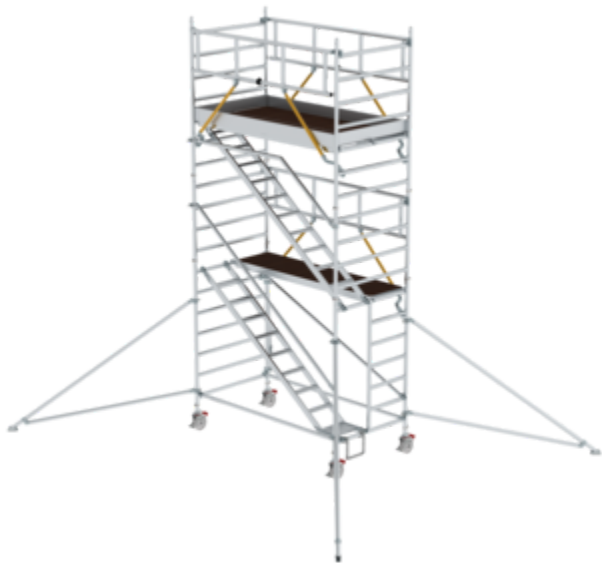

### Specification

|   |  |  |  |   |
|---|--|--|--|---|
| Working height<br><b>6.47 m</b>   | Scaffolding height<br><b>5.74 m</b>                                | Platform height<br><b>4.47 m</b>                                       | Platform width<br><b>1.35 m</b>  | Platform length<br><b>2.45 m</b>  |
| Load capacity<br><b>2 kN/m<sup>2</sup></b>                              | Weight<br><b>242 kg</b>  | Transport dimensions<br><b>3100 x 1400 x 800 mm, 236 kg</b>            | Indoor use, central installation<br><b>possible &amp; allowed</b>      | Indoor use, lateral installation<br><b>possible &amp; allowed</b>       |
| Outdoor use, central installation<br><b>possible &amp; allowed</b>      | Outdoor use, lateral installation<br><b>possible &amp; allowed</b> | Ballasting of scaffolding, indoor, central installation<br><b>0 kg</b> | Ballasting of scaffolding, indoor, lateral installation<br><b>0 kg</b> | Ballasting of scaffolding, outdoor, central installation<br><b>0 kg</b> |
| Ballasting of scaffolding, outdoor, lateral installation<br><b>0 kg</b> | Business division<br><b>MUNK Günzburger Steigtechnik</b>           | Article no.<br><b>167211</b>   | Price<br><b>€ 7,977.00</b>   |   |

### Facts

- Mobile scaffolding made of sturdy round aluminium tubing with welded frame parts
- Secured all around thanks to leading railing, can be assembled and dismantled from level to level

- inclined steps from platform to platform with 100 mm deep, ribbed aluminium steps and handrail for safe ascent and descent as if on stairs
- All scaffolding parts are also available individually as spare or extension parts
- Stable and flexible thanks to folding outriggers
- Also ideal for wall mounting or moving in narrow aisles
- Access through opening in the entry frame
- Four Ø 200 mm swivel castors with centric load application, locking mechanisms and spindles
- Large-format work area in width of 1.35 m
- Aluminium toe boards and railing frames with integrated knee board as safety railing
- Installation and removal without tools from platform to platform thanks to push-fit connectors and quick-release fasteners
- Easy to handle thanks to individual lightweight parts
- Different platform lengths available (1.80 / 2.45 / 3.0 m)
- Working heights up to 12.35 m
- GS-tested as per DIN EN 1004
- Load class/scaffolding group 3: 2.0 kN/m<sup>2</sup>

## Scope of supply


- Entry frame: 1 x
- Push-fit frame, 1.35 m.: 3 x
- Safety railing for mobile scaffolding: 3 x
- Platform with longitudinal flap: 1 x
- Platform without flap: 2 x
- Toe board front side: 2 x
- Toe board long side: 2 x
- Diagonal brace: 1 x
- Horizontal strut: 2 x
- Triangular outrigger: 4 x
- Swivel castor with spindle: 4 x
- Top handrail for mobile scaffolding with inclined ascent: 1 x
- Handrail for mobile scaffolding with inclined ascent: 1 x
- Inclined ascent below: 1 x
- Inclined ascent: 1 x
- Step-on bracket: 1 x
- Instructions for assembly and use EN 1004-2 - de: 1 x
- Push-fit frame, 1.35 m.: 2 x

## Information on sustainability criteria

- Corporate certification: ISO 9001
- Corporate certification: EN 1090
- Corporate certification: EcoVadis
- RoHS
- REACH
- The MUNK Group complies with a Code of Conduct
- The Supply Chain Act does not apply due to our size
- The materials used are listed in the technical specification
- Resource-saving production: own photovoltaic systems
- Energy-efficient consumption during production: LED lighting
- Repairability, durability and quality: 15-year warranty on series products made in Germany
- Recyclability: Our products are mostly made of aluminium, steel or wood and can be fed directly into the recycling process.
- Socially acceptable working conditions in production: fair wages, gender equality
- Economical and recyclable packaging: no use of polystyrene, predominantly use of wood and cardboard, small amounts of plastic
- No health hazards for the users

## More product pictures

---



## Added value

---

### Safety at heights

- Optional protective assembly railing as safety railing during installation and removal
- Installation without the need of tools, uncomplicated and easy to handle
- Railing with integrated knee board and aluminium toe boards



### Highest quality

- User-friendly and robust design
- Low weight of the individual parts for easy handling
- Welded round tube frames for maximum stability
- All-round profiled rungs for safe ascent and descent



### Modular kit system

- More than 180 variants are possible by combining different individual parts
- Flexible adaptations and extensions possible at any time
- Individual parts at the original part price
- Installation and removal without tools



### Safe standing

- Adjustable outriggers with swing base or chassis bar ensure safe working depending on model
- Easy to handle
- Additional ballast weights required depending on application



### Sturdy connection

- Automatically closing scaffolding claw with sophisticated geometry for a secure connection
- Innovative spring clip for plug-on frame – no accidental loosening or losing possible
- Transverse and diagonal braces for high stability




### Flexible basis

- Swivel castors with load centring in braked condition
- Height adjustment for level compensation
- Various sizes and designs


















### Everything at a glance

- Clip tray for clearly visible attachment of the necessary test documents to the scaffolding
- Weather and UV-resistant



## Accessories

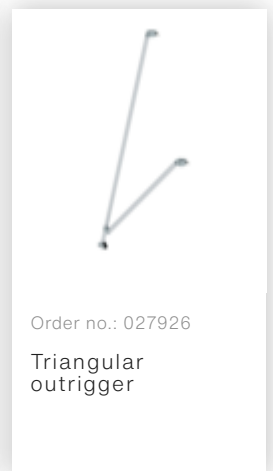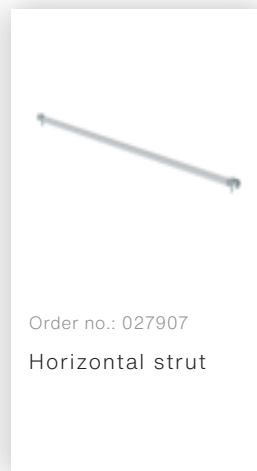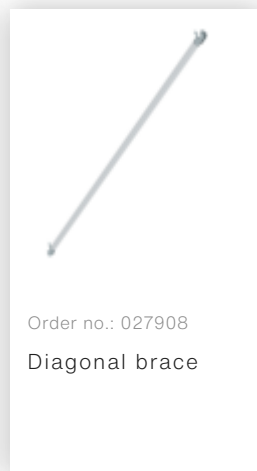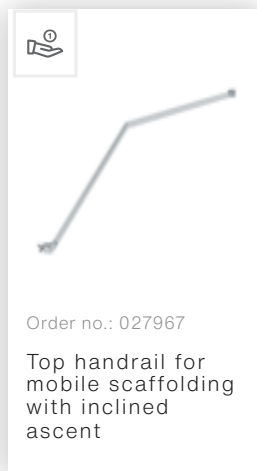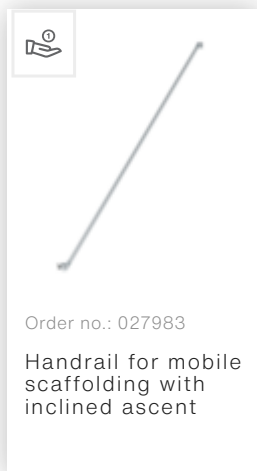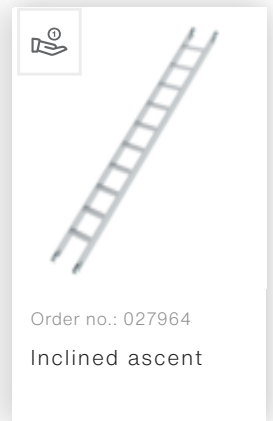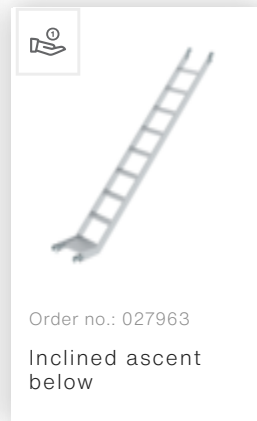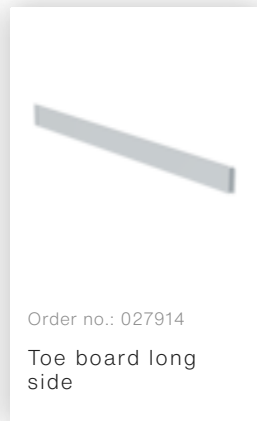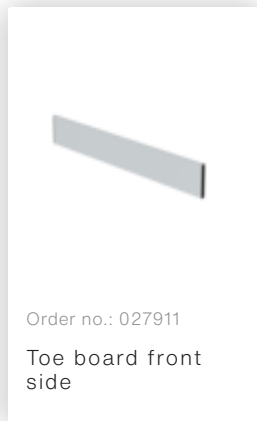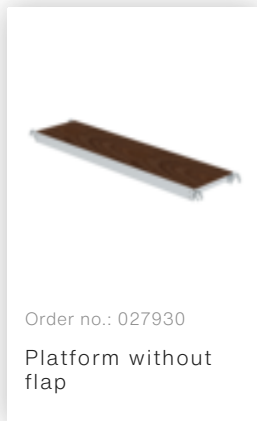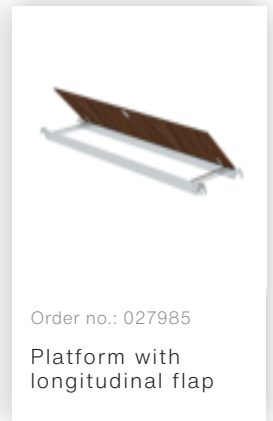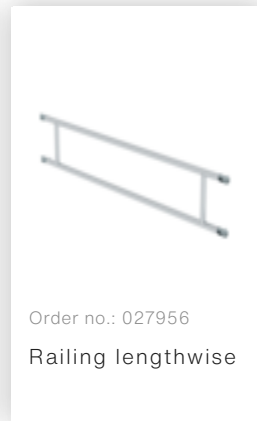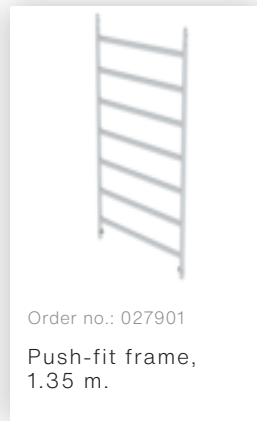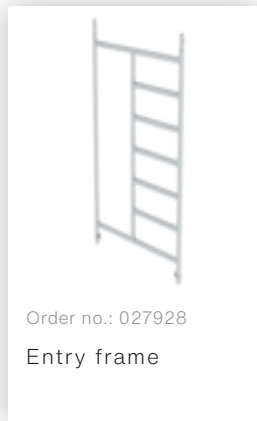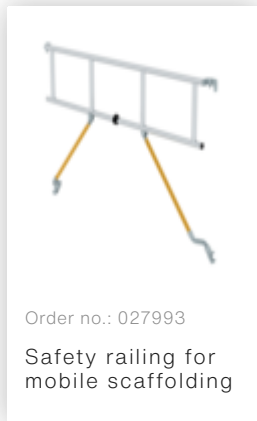



Order no.: 027917

Swivel castor with spindle




Order no.: 027940

Step-on bracket



Order no.: 027912

Ballast weight



Order no.: 019081

Clip tray for tubes



Order no.: 027920

Wall spacer adjustable



Order no.: 070506

Frame extension can be clamped on



Order no.: 019274

Storage tray 500 x 220 mm



Order no.: 019276

Storage tray 800 x 300 mm



Order no.: 019136

Spring clip for mobile scaffolding



Order no.: 019137

Spring clip for mobile scaffolding



Order no.: 070520

Scaffolding strut telescopic



Order no.: 027104

Height-adjustable spindle



Order no.: 027922

Swivel castor with spindle, non-marking grey



Order no.: 027921

Swivel castor with spindle, electrically conductive



Order no.: 027958

Swivel castor





Order no.: 019176  
Inventory sticker



Order no.: 019175  
Inspection sticker

## Corporate certifications

---

on sustainability criteria

