


Order no.: 115510

Folding scaffolding SG with triple platform

Platform height [mm]

- 2510
- 4470
- 6430
- 8390

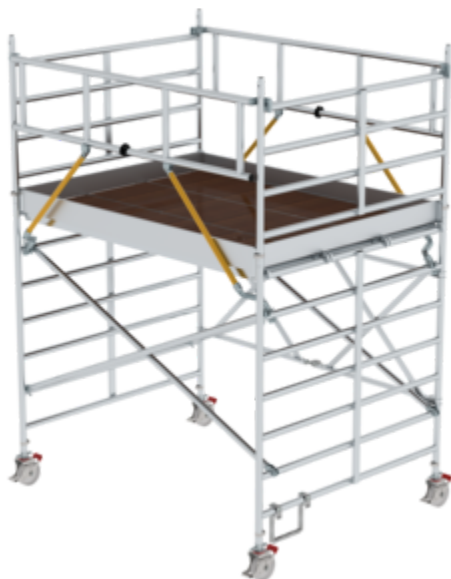

Specification

Working height 4.51 m	Scaffolding height 3.78 m	Platform height 2.51 m	Platform width 1.9 m	Platform length 2.45 m
Load capacity 1.5 kN/m²	Weight 192 kg	Transport dimensions 3000 x 2000 x 900 mm, 183 kg	Indoor use, central installation possible & allowed	Outdoor use, central installation possible & allowed
Ballasting of scaffolding, indoor, central installation 0 kg	Ballasting of scaffolding, outdoor, central installation 0 kg	Business division MUNK Günzburger Steigtechnik	Article no. 115510	Price € 5,092.00

Facts

- Mobile scaffolding made of sturdy round aluminium tubing with welded frame parts
- Secured all around thanks to leading railing, can be assembled and dismantled from level to level
- Double folding frame made of rectangular tube side-rails with self-locking hinges
- Large work area of 4.5 m²
- Space-saving transport and storage

- Four Ø 200 mm swivel castors with centric load application, locking mechanisms and spindles
- Aluminium toe boards and railing frames with integrated knee board as safety railing
- Simple setup and removal without tools
- Working heights up to 10.39 m
- GS-tested as per DIN EN 1004
- Load class/scaffolding group 2: 1.5 kN/m²

Information on sustainability criteria

- Corporate certification: ISO 9001
- Corporate certification: EN 1090
- Corporate certification: EcoVadis
- RoHS
- REACH
- The MUNK Group complies with a Code of Conduct
- The Supply Chain Act does not apply due to our size
- The materials used are listed in the technical specification
- Resource-saving production: own photovoltaic systems
- Energy-efficient consumption during production: LED lighting
- Repairability, durability and quality: 15-year warranty on series products made in Germany
- Recyclability: Our products are mostly made of aluminium, steel or wood and can be fed directly into the recycling process.
- Socially acceptable working conditions in production: fair wages, gender equality
- Economical and recyclable packaging: no use of polystyrene, predominantly use of wood and cardboard, small amounts of plastic
- No health hazards for the users

More product pictures



Added value

Safety at heights

- Optional protective assembly railing as safety railing during installation and removal
- Installation without the need of tools, uncomplicated and easy to handle
- Railing with integrated knee board and aluminium toe boards



Highest quality

- User-friendly and robust design
- Low weight of the individual parts for easy handling
- Welded round tube frames for maximum stability
- All-round profiled rungs for safe ascent and descent



Modular kit system

- More than 180 variants are possible by combining different individual parts
- Flexible adaptations and extensions possible at any time
- Individual parts at the original part price
- Installation and removal without tools



Safe standing

- Adjustable outriggers with swing base or chassis bar ensure safe working depending on model
- Easy to handle
- Additional ballast weights required depending on application




Sturdy connection

- Automatically closing scaffolding claw with sophisticated geometry for a secure connection
- Innovative spring clip for plug-on frame – no accidental loosening or losing possible
- Transverse and diagonal braces for high stability



Everything at a glance

- Clip tray for clearly visible attachment of the necessary test documents to the scaffolding
- Weather and UV-resistant



Flexible basis

- Swivel castors with load centring in braked condition
- Height adjustment for level compensation
- Various sizes and designs



Corporate certifications

on sustainability criteria



Management System
ISO 9001:2015
ISO 14001:2015
www.tuv.com
ID 9108612548

