


Order no.: 930102

Aluminium profile 40x40 mm

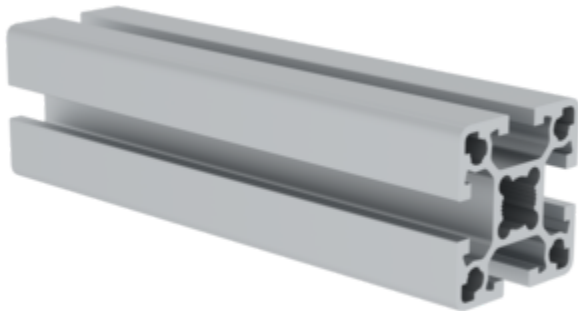

Surface finish

Anodised aluminium

Natural aluminium

Specification

Profile type Construction profile	Length max. 6 m	Material Aluminium	Profile dimension X 40 mm	Profile dimension Y 40 mm
Weight per metre 1560 g/m	Groove size 8 mm	No. of grooves 4	Ix Area moment of inertia 96331	Iy Area moment of inertia 96331
Cross-sectional area FL 573.32 mm ²	Surface texture Anodised aluminium	Anodising Bright E6/EV1	End design Sawn	Core hole diameter M12
Order no. 930102				

Facts

- Construction profile made from aluminium
- Screw channel profile with T-slot
- For sturdy, versatile constructions
- Simple installation
- Versatile use
- Added visual and functional benefits

Description

The 40x40 mm aluminium profile is the ideal sturdy construction profile for your projects. The profile is made from high-quality aluminium and has screw channels for simple installation. The profile is available in various lengths up to 6000 mm and is versatile in its use. The T-slot profile is available in anodised aluminium or natural aluminium versions.

- Bright anodised
- In different lengths up to 6000 mm

Scope of supply

- Aluminium profiles, sawn to the required length (max. 6 m): 1 x

Information on sustainability criteria

- Corporate certification: ISO 9001
- Corporate certification: ISO 14001
- Corporate certification: EN 1090
- Corporate certification: EcoVadis
- RoHS
- REACH
- The MUNK Group complies with a Code of Conduct
- The Supply Chain Act does not apply due to our size
- The materials used are listed in the technical specification
- Resource-saving production: own photovoltaic systems
- Energy-efficient consumption during production: LED lighting
- Repairability, durability and quality: 15-year warranty on series products made in Germany
- Recyclability: Our products are mostly made of aluminium, steel or wood and can be fed directly into the recycling process.
- Socially acceptable working conditions in production: fair wages, gender equality
- Economical and recyclable packaging: no use of polystyrene, predominantly use of wood and cardboard, small amounts of plastic
- No health hazards for the users

More product pictures

Corporate certifications

on sustainability criteria



Management System
ISO 9001:2015
ISO 14001:2015
www.tuv.com
ID 9108612548

