

Order no.: 010006

Rung straight ladder without stabiliser



Number of rungs

- 6
- 8
- 10
- 12
- 14
- 16
- 18
- 20
- 24

Specification

Working height 3 m	Step design Rungs	Number of steps/rungs 6 rungs	Step/Rung height 30 mm	Step depth 30 mm
Step/Rung distance 280 mm	Ladder length 1.91 m	Outer width 420 mm	Depth of side-rails 58 mm	Width of side-rails 25 mm
Max. load capacity 150 kg	Design type To lean against	Weight 3 kg	Transport dimensions 1915 x 425 x 70 mm, 3 kg	Business division MUNK Günzburger Steigtechnik
Article no. 010006	Price € 122.00			

Facts

- Aluminium rung straight ladder
- Stable rectangular tube side-rails
- Rectangular rungs grooved on both sides, 30 x 30 mm
- 4-fold edged rung-to-side-rail connection
- Rung distance: 280 mm

- Ladder width: 420 mm (without stabiliser)
- nivello® ladder shoes with patented 2-axis inclination technology
- Maximum load: 150 kg
- Note: Straight ladders over 3.0 m can be used without a stabiliser only when they are used exclusively for their intended purpose (e.g. permanently installed, fitted with hooks, fastened with a belt)


Scope of supply

- Ladder: 1 x

Information on sustainability criteria

- Corporate certification: ISO 9001
- Corporate certification: EN 1090
- Corporate certification: EcoVadis
- RoHS
- REACH
- The MUNK Group complies with a Code of Conduct
- The Supply Chain Act does not apply due to our size
- The materials used are listed in the technical specification
- Resource-saving production: own photovoltaic systems
- Energy-efficient consumption during production: LED lighting
- Repairability, durability and quality: 15-year warranty on series products made in Germany
- Recyclability: Our products are mostly made of aluminium, steel or wood and can be fed directly into the recycling process.
- Socially acceptable working conditions in production: fair wages, gender equality
- Economical and recyclable packaging: no use of polystyrene, predominantly use of wood and cardboard, small amounts of plastic
- No health hazards for the users

More product pictures

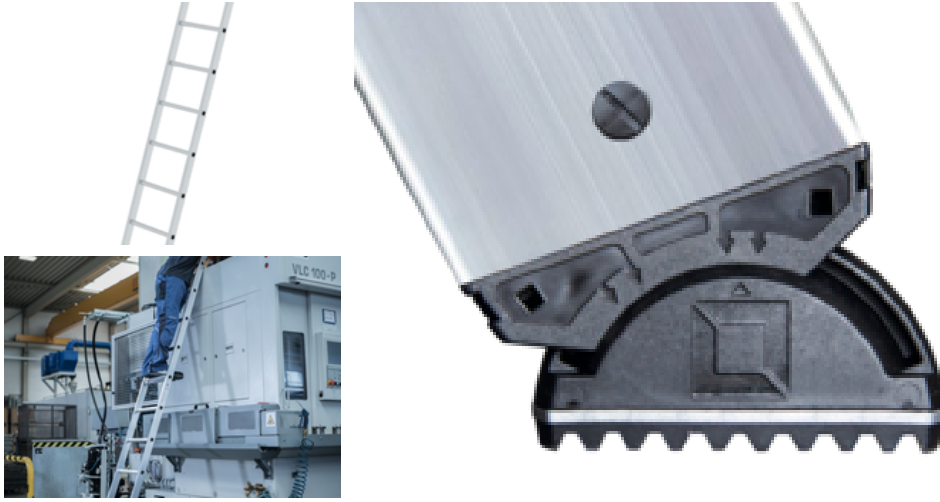

Added value

The movable ladder shoe sets new standards in stability

[Learn more](#)



Retrofit stabiliser


Safe, standards-compliant ascent

- For retrofitting existing ladders with ladder lengths over 3.0 m in compliance with standards
- Non-slip ladder shoes
- Available in different widths



Note: Working heights

- National regulations (e.g. TRBS 2121 Part 2 in Germany) must be complied with with regard to the maximum working height when using the ladder as a workstation.
- Information on [TRBS 2121 Part 2](#) has been summarised on our Service page
- Read our [tips and tricks](#) on how to calculate [working height](#)



Accessories



Order no.: 019326

Accessory package "TRBS kit"



Order no.: 019324

Accessory package "Secure footing"



Order no.: 019325

Accessory package "Secure footing outdoors"



Order no.: 019328

Accessory package "Practical aids 2"



Order no.: 019309

Accessory package "Ladder head protection, complete set"




Order no.: 019910

Hook-in step R13 for rung ladders



Order no.: 019900

Hook-in platform R13 for rung ladders



Order no.: 019213

nivello® foot plate for gratings 126 x 89 mm



Order no.: 019209

nivello® foot plate, standard



Order no.: 019115

Bucket hook standard




Order no.: 019100

Wall spacer for rung ladders



Order no.: 019842

Wall spacer for insulated facades



Order no.: 019114

Gutter bracket




Order no.: 011179

Ridge bracket




Order no.: 019280


Attachable section "Window cleaner"




Order no.: 019902
MaxxStep step module




Order no.: 019287
Tool bag




Order no.: 019319
Ladder head protection, gutter




Order no.: 019310
Ladder head protection, rung and step hole




Order no.: 019315
Ladder head protection




Order no.: 019318
Ladder head protection, beam




Order no.: 019103
Exit side-rail retractable




Order no.: 019104
Exit side-rail retractable




Order no.: 019185
Hook for step and rung ladders




Order no.: 019181
Hook for special ladders, angled




Order no.: 019177
Hook for special ladders, round




Order no.: 019940
Ground spikes for ladders with nivello ladder shoe




Order no.: 019224
nivello® foot plate, claw




Order no.: 019176
Inventory sticker



Order no.: 019175
Inspection sticker



Order no.: 030296
Push-fit handrail for rung/step spacing 280/263 mm



Order no.: 019346
Hook with anti-lift device




Order no.: 019219
nivello® foot plate, electrically conductive




Order no.: 019211
nivello® foot plate for smooth surfaces



Order no.: 019209
nivello® foot plate, standard




Order no.: 030360
Retrofit stabiliser 0.93 m for aluminium ladders



Order no.: 019914
Side-rail extension for ladder side-rail



Order no.: 019215
nivello® inside shoe, electrically conductive




Order no.: 030385
Folding stabiliser, 1.2 m width




Order no.: 030390
Retrofit stabiliser with nivello® ladder shoe width 0.93 m

Spare parts



Order no.: 019205
nivello® inside shoe



Order no.: 019147
Information sticker for rung straight ladders under 3 m

Certificates



17KFP0519-03 -
Test Certificate
"Bauart geprüft"

Valid in



DIN EN 131-
3:2007
EK5/AK1 17-1:2017
DIN EN 131-1:2016
DIN EN 131-2:2017
PAK-
ANFORDERUNG
FÜR GS -
ABSCHNITT
3.1(PAH-
REQUIREMENT
FOR GS - CL. 3.1)
AFPS GS 2014:01
PAK

Corporate certifications

on sustainability criteria

