



Order no.: 031216

## 2-section multi-purpose ladder with rungs, with nivello® stabiliser



Number of rungs

2x8

2x10

2x12

2x14

### Specification

|  |   |   |  |                                     |
|--|---|---|--|-------------------------------------|
| Working height<br><b>5.3 m</b>             | Step design<br><b>Rungs</b>                           | Number of steps/rungs<br><b>2x 8 rungs</b>                | Step/Rung height<br><b>30 mm</b>                         | Step depth<br><b>30 mm</b>          |
| Step/Rung distance<br><b>280 mm</b>        | Ladder length as double-sided ladder<br><b>2.49 m</b> | Base spread as double ladder<br><b>1.69 m</b>             | Inclination<br><b>70 °</b>                               | Extended length<br><b>4.18 m</b>    |
| Length of ladder sections<br><b>2.49 m</b> | Outer width<br><b>490 mm</b>                          | Stabiliser width<br><b>930 mm</b>                         | Depth of side-rails<br><b>73 mm</b>                      | Width of side-rails<br><b>25 mm</b> |
| Max. load capacity<br><b>150 kg</b>        | Weight<br><b>12 kg</b>                                | Transport dimensions<br><b>2480 x 495 x 149 mm, 12 kg</b> | Business division<br><b>MUNK Günzburger Steigtechnik</b> | Order no.<br><b>031216</b>          |
| Price<br><b>€ 378.00</b>                   |   |   |  |                                     |

### Facts

- Multi-purpose rung ladder made from aluminium
- Stable rectangular tube side-rails

- Rectangular rungs grooved on both sides, 30 x 30 mm
- 4-fold edged rung-to-side-rail connection
- Can be used as a step ladder, straight ladder and push-up extension ladder
- Simple height adjustment thanks to insertion hook with lift-off protection
- Corrosion-resistant guide fixtures
- nivello® ladder shoes and nivello® stabiliser (enclosed separately)
- Spreader lock with two high-strength polyester straps
- Rung distance: 280 mm
- Ladder width: 490 mm (without stabiliser)
- Maximum load: 150 kg

### **Scope of supply**

- Ladder: 1 x
- Stabiliser (enclosed separately): 1 x
- Instructions for use and operation: 1 x

### **Information on sustainability criteria**


---

- Corporate certification: ISO 9001
- Corporate certification: ISO 14001
- Corporate certification: EN 1090
- Corporate certification: EcoVadis
- RoHS
- REACH
- The MUNK Group complies with a Code of Conduct
- The Supply Chain Act does not apply due to our size
- The materials used are listed in the technical specification
- Resource-saving production: own photovoltaic systems
- Energy-efficient consumption during production: LED lighting

- Repairability, durability and quality: 15-year warranty on series products made in Germany
- Recyclability: Our products are mostly made of aluminium, steel or wood and can be fed directly into the recycling process.
- Socially acceptable working conditions in production: fair wages, gender equality
- Economical and recyclable packaging: no use of polystyrene, predominantly use of wood and cardboard, small amounts of plastic
- No health hazards for the users

## More product pictures

---

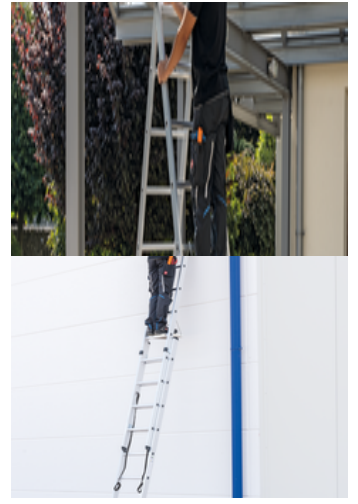

## Added value

---

### Industrial grade

Stable and robust for tough everyday working life (including 4-way edging)

- Corrosion-resistant fixtures
- Use of high-quality and high-strength materials
- Versatile and practical accessories



### Flexibility

- Universal and versatile use
- Compact size for transport and storage
- Upper ladder can also be used individually (up to 3.0 m)



The movable ladder shoe sets new standards in stability

### [Learn more](#)



### Easy handling

- Insertion hooks with lift-off protection or automatically locking steel hinges
- Optimised guidance, thanks to guide fixtures with high-strength plastic coating

### Large range of accessories

- The right equipment for every application
- Practical and makes work easier
- Suitable for universal use on Günzburger Steigtechnik ladders



### **nivello® stabiliser**

Extra safe, standards-compliant ascent for straight ladders over 3.0 m

- Extra wide stabiliser for even greater stability
- nivello® ladder shoes with patented 2-axis inclination technology, integrated work angle check and exchangeable foot plates
- Individually available as spare part




### **roll-bar retrofit kit**

- Rolling instead of carrying: ergonomic and convenient handling
- Simple, no-drill mounting on stabilisers
- User-friendly operation without bending down




### **Note: Working heights**

- National regulations (e.g. TRBS 2121 Part 2 in Germany) must be complied with with regard to the maximum working height when using the ladder as a workstation.
- Information on [TRBS 2121 Part 2](#) has been summarised on our Service page
- Read our [tips and tricks](#) on how to calculate [working height](#)




## Certificates

---



18KFP0038-02 -  
Test Certificate  
"Bauart geprüft"

Valid in



DIN EN 131-  
3:2007  
PAK-  
ANFORDERUNG  
FÜR GS -  
ABSCHNITT  
3.1(PAH-  
REQUIREMENT  
FOR GS - CL. 3.1)  
AFPS GS 2014:01  
PAK  
EK5/AK1 17-  
03:2017  
DIN EN 131-1:2016  
DIN EN 131-2:2017

## Corporate certifications

---

on sustainability criteria



Management System  
ISO 9001:2015  
ISO 14001:2015  
[www.tuv.com](http://www.tuv.com)  
ID 9108612548



**Nachhaltigkeit**  
**EcoVadis**  
sustainable supply management  
CSR-Rating in Silber 2022

