



Order no.: 035006

Rung straight ladder made of glass-fibre reinforced plastic / aluminium without stabiliser



Number of rungs

- 6 8 10 12 14

Specification

Working height 3 m	Step design Rungs	Number of steps/rungs 6 rungs	Step/Rung height 30 mm	Step depth 30 mm
Step/Rung distance 280 mm	Ladder length 1.91 m	Outer width 420 mm	Depth of side-rails 58 mm	Width of side-rails 25 mm
Max. load capacity 150 kg	Design type To lean against	Weight 4.5 kg	Transport dimensions 1910 x 427 x 68 mm, 4.5 kg	Business division MUNK Günzburger Steigtechnik
Article no. 035006	Price € 270.00			

Facts

- Rung straight ladder made of reinforced fibre glass/aluminium
- Side-rails made of reinforced fibre glass profiles (min. 10 years ageing resistance)
- Rectangular rungs grooved on both sides 30 x 30 mm, aluminium
- 4-fold edged rung-to-side-rail connection

- Rung distance: 280 mm
- Ladder width: 420 mm (without stabiliser)
- Maximum load: 150 kg
- Suitable for working near or on live parts
- Tested up to 1,000 V as per DIN EN 61478:2002 Clause 6.5.1 and A1:2004 Category 1 (corresponds to European Standard DIN EN 131-7)
- nivello® ladder shoes with patented 2-axis inclination technology
- Note: Straight ladders over 3.0 m can be used without a stabiliser only when they are used exclusively for their intended purpose (e.g. permanently installed, fitted with hooks, fastened with a belt)
- Note: Products with GRP content are excluded from exchange due to their sensitivity, the statutory warranty applies (resistance to ageing 10 years).

Scope of supply

- Ladder: 1 x

Information on sustainability criteria

- Corporate certification: ISO 9001
- Corporate certification: EN 1090
- Corporate certification: EcoVadis
- RoHS
- REACH
- The MUNK Group complies with a Code of Conduct
- The Supply Chain Act does not apply due to our size
- The materials used are listed in the technical specification
- Resource-saving production: own photovoltaic systems
- Energy-efficient consumption during production: LED lighting

- Repairability, durability and quality: 15-year warranty on series products made in Germany
- Recyclability: Our products are mostly made of aluminium, steel or wood and can be fed directly into the recycling process.
- Socially acceptable working conditions in production: fair wages, gender equality
- Economical and recyclable packaging: no use of polystyrene, predominantly use of wood and cardboard, small amounts of plastic
- No health hazards for the users

More product pictures



Added value

The movable ladder shoe sets new standards in stability

[Learn more](#)



Fiberglass

Ladders made of GFRP offer the perfect properties for special challenges. [Find out](#) what makes GFRP such a special material, how we use it for ladders and where these ladders are used.



Retrofit stabiliser

Safe, standards-compliant ascent

- For retrofitting existing ladders with ladder lengths over 3.0 m in compliance with standards
- Non-slip ladder shoes
- Available in different widths




Note: Working heights


- National regulations (e.g. TRBS 2121 Part 2 in Germany) must be complied with with regard to the maximum working height when using the ladder as a workstation.
- Information on [TRBS 2121 Part 2](#) has been summarised on our Service page
- Read our [tips and tricks](#) on how to calculate [working height](#)




Accessories




Order no.: 019326
Accessory package "TRBS kit"




Order no.: 019324
Accessory package "Secure footing"




Order no.: 019325
Accessory package "Secure footing outdoors"




Order no.: 019328
Accessory package "Practical aids 2"




Order no.: 019309
Accessory package "Ladder head protection, complete set"




Order no.: 019900
Hook-in platform R13 for rung ladders




Order no.: 019910
Hook-in step R13 for rung ladders




Order no.: 019100
Wall spacer for rung ladders




Order no.: 019114
Gutter bracket




Order no.: 011179
Ridge bracket




Order no.: 019280
Attachable section "Window cleaner"




Order no.: 019902
MaxxStep step module













Order no.: 019287
Tool bag




Order no.: 019115
Bucket hook



Order no.: 019219
nivello® foot plate, electrically conductive

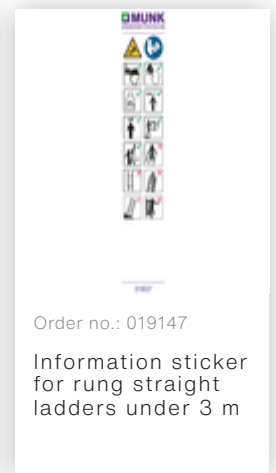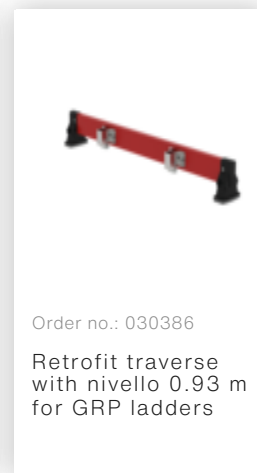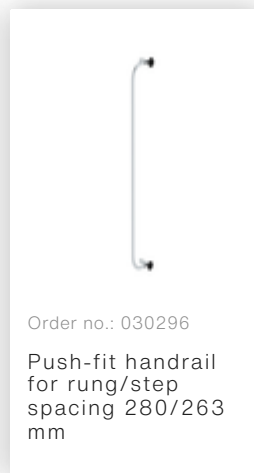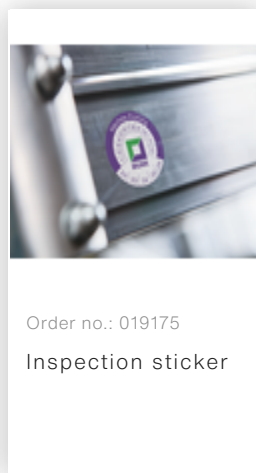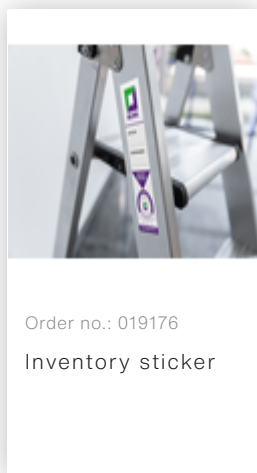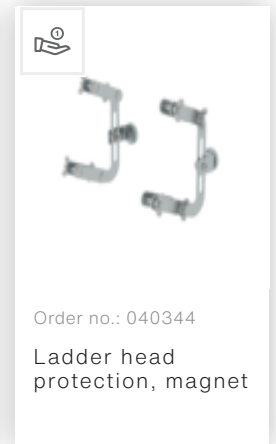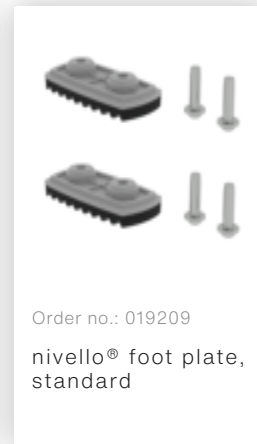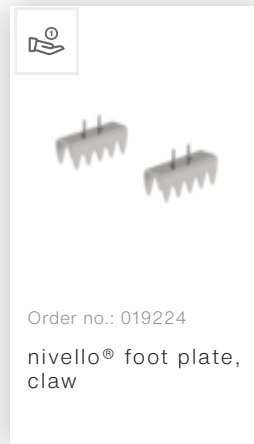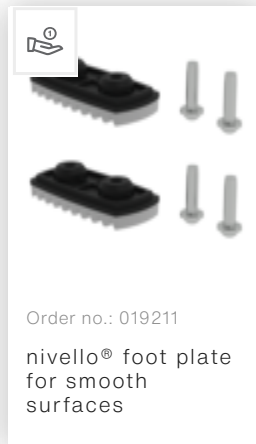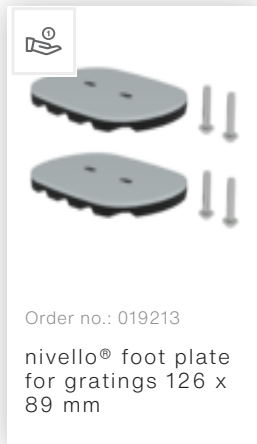

Spare parts

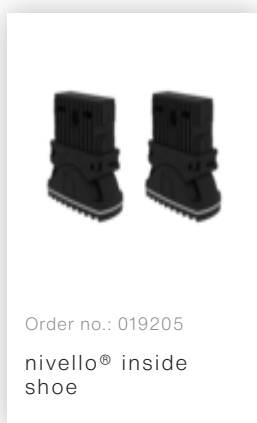

Certificates



17KFP1941-02 -
Test Certificate
"Bauart geprüft"

Valid in



DIN EN 131-
3:2007
PAK-
ANFORDERUNG
FÜR GS -
ABSCHNITT
3.1(PAH-
REQUIREMENT
FOR GS - CL. 3.1)
AFPS GS 2014:01
PAK
EK5/AK1 17-1:2017
DIN EN 131-1:2016
DIN EN 131-2:2017

Corporate certifications

on sustainability criteria

