

Order no.: 110003

Scaling ladder push-fit section DIN EN 1147, wood



Specification

Ladder length 780 mm	Ladder length, 4 scaling ladders 8.4 m	Outer width 485 mm	Ladder feet Steel point	Depth of side-rails 74.8 mm
Width of side-rails 36.7 mm	Step/Rung height 39 mm	Step depth 21 mm	Number of steps/rungs 2 rungs	Step/Rung distance 273 mm
Max. load capacity 216 kg	Persons max. 2	Material Wood	Weight 4 kg	Transport dimensions 775 x 483 x 82 mm, 4 kg
Business division MUNK Rettungstechnik	Article no. 110003			

Facts


- Rescue ladder compliant with DIN EN 1147
- Made of aluminium or wood
- Secure push-fit connections with spring-loaded locking pin
- Conical side-rail guide for safe stance

- Corrosion-resistant fixtures made of galvanised steel
- Permissible load: 216 kg / 2 people
- Side-rails made of finger-jointed pine or knot-free Oregon pine
- Rungs made of knot-free ash
- Painted in a colourless varnish


Information on sustainability criteria

- Corporate certification: ISO 9001
- Corporate certification: EN 1090
- Corporate certification: EcoVadis
- RoHS
- REACH
- The MUNK Group complies with a Code of Conduct
- The Supply Chain Act does not apply due to our size
- The materials used are listed in the technical specification
- Resource-saving production: own photovoltaic systems
- Energy-efficient consumption during production: LED lighting
- Repairability, durability and quality: 15-year warranty on series products made in Germany
- Recyclability: Our products are mostly made of aluminium, steel or wood and can be fed directly into the recycling process.
- Socially acceptable working conditions in production: fair wages, gender equality
- Economical and recyclable packaging: no use of polystyrene, predominantly use of wood and cardboard, small amounts of plastic
- No health hazards for the users

More product pictures

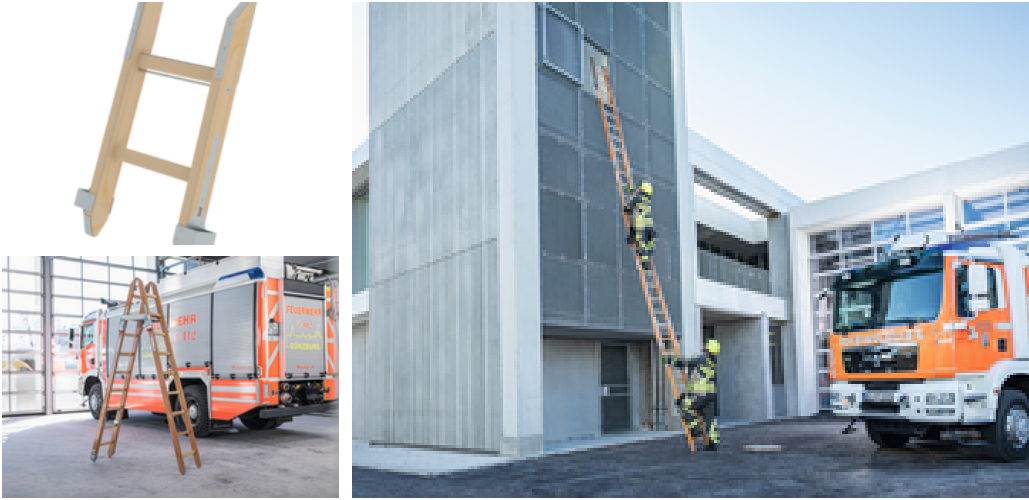

Accessories

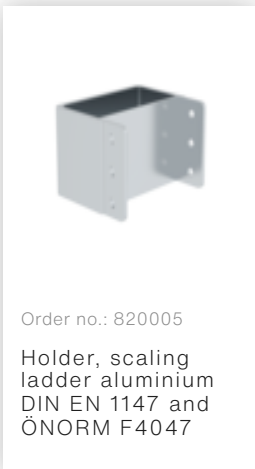

Order no.: 820005

Holder, scaling
ladder aluminium
DIN EN 1147 and
ÖNORM F4047

Corporate certifications

on sustainability criteria

