

Order no.: 115601

## Folding scaffold 0.75x1.80m with extension unit

Platform width [mm]

750

1350



### Specification

Working height <b>3.48 m</b>	Scaffolding height <b>2.83 m</b>	Platform height <b>1.48 m</b>	Platform width <b>750 mm</b>	Platform length <b>1.8 m</b>
Load capacity <b>1.5 kN/m<sup>2</sup></b>	Weight <b>48 kg</b>	Indoor use, central installation <b>possible &amp; allowed</b>	Outdoor use, central installation <b>possible &amp; allowed</b>	Ballasting of scaffolding, indoor, central installation <b>60 kg</b>
Ballasting of scaffolding, outdoor, central installation <b>190 kg</b>	Business division <b>MUNK Günzburger Steigtechnik</b>	Article no. <b>115601</b>	Price <b>€ 1,657.00</b>	

### Facts

- Mobile scaffolding made of sturdy round aluminium tubing with welded frame parts
- Folding frame made of rectangular tube side-rails with self-locking hinges
- Space-saving transport and storage
- Sturdy railing for safety railing
- Slip-resistant platform with large trapdoor for secure standing

- Four Ø 125 mm swivel castors with locking mechanisms
- Railing frame with horizontal struts for safety railing
- Delivered in assemblies. Once assembled, the scaffolding can be quickly set up and dismantled without tools
- Different platform widths available (0.75 / 1.35 m)
- Working heights up to 3.48 m
- Type-tested
- Load class/scaffolding group 2: 1.5 kN/m<sup>2</sup>

### Scope of supply

- Folding frame unit with swivel castors: 1 x
- Platform with trapdoor: 1 x
- Horizontal strut: 3 x
- Railing frame front side, for folding scaffolding: 2 x

### Information on sustainability criteria

---

- Corporate certification: ISO 9001
- Corporate certification: EN 1090
- Corporate certification: EcoVadis
- RoHS
- REACH
- The MUNK Group complies with a Code of Conduct
- The Supply Chain Act does not apply due to our size
- The materials used are listed in the technical specification
- Resource-saving production: own photovoltaic systems
- Energy-efficient consumption during production: LED lighting
- Repairability, durability and quality: 15-year warranty on series products made in Germany
- Recyclability: Our products are mostly made of aluminium, steel or wood and can be fed directly into the recycling process.
- Socially acceptable working conditions in production: fair wages, gender equality

- Economical and recyclable packaging: no use of polystyrene, predominantly use of wood and cardboard, small amounts of plastic
- No health hazards for the users

## More product pictures

---



## Added value

---

### Safety at heights

- Optional protective assembly railing as safety railing during installation and removal
- Installation without the need of tools, uncomplicated and easy to handle
- Railing with integrated knee board and aluminium toe boards



### Sturdy connection

- Automatically closing scaffolding claw with sophisticated geometry for a secure connection
- Innovative spring clip for plug-on frame – no accidental loosening or losing possible
- Transverse and diagonal braces for high stability




### Highest quality

- User-friendly and robust design
- Low weight of the individual parts for easy handling
- Welded round tube frames for maximum stability
- All-round profiled rungs for safe ascent and descent

















### Everything at a glance

- Clip tray for clearly visible attachment of the necessary test documents to the scaffolding
- Weather and UV-resistant



## Accessories

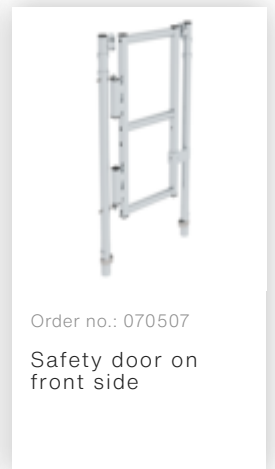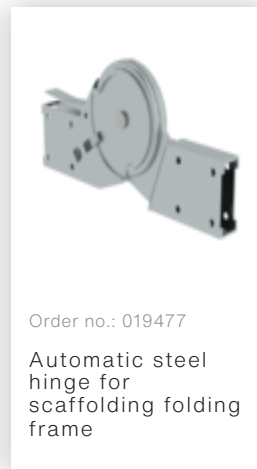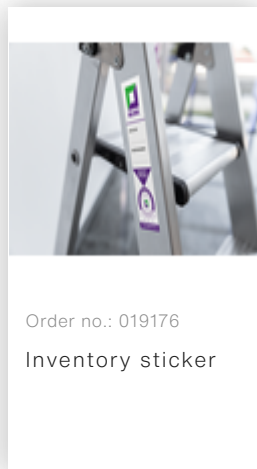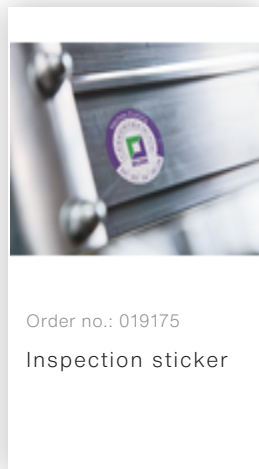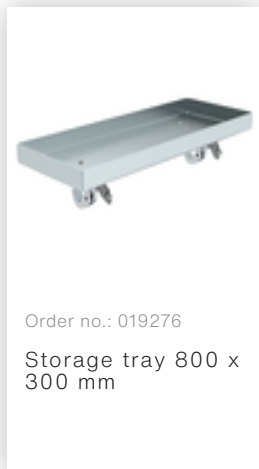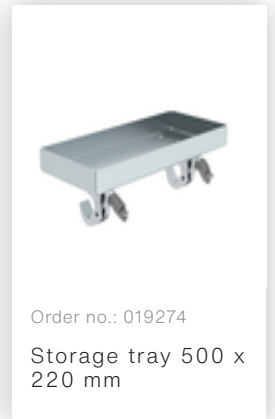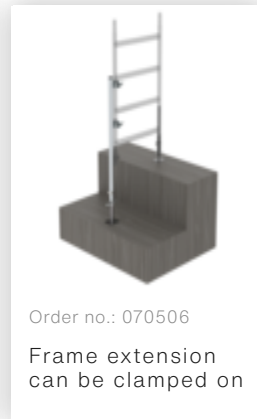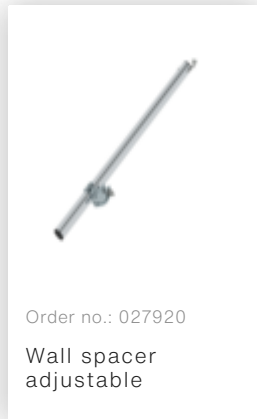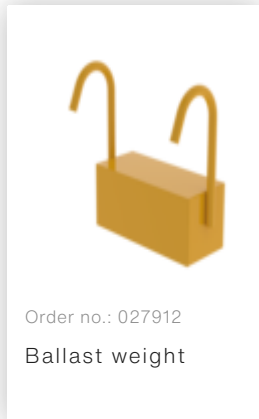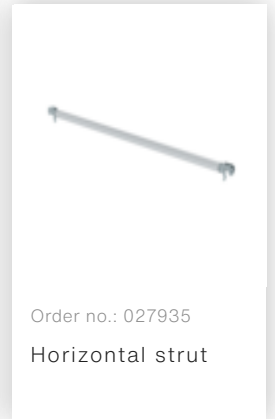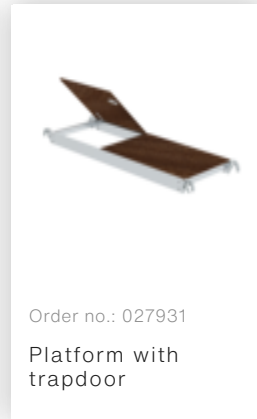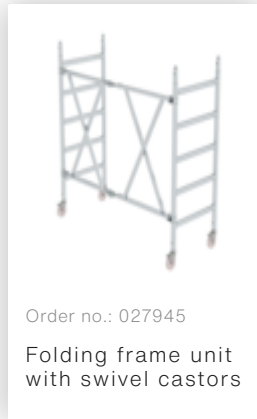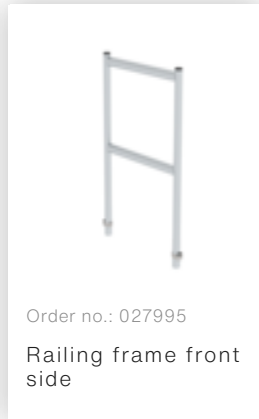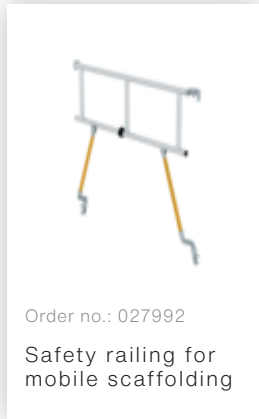



Order no.: 019136

Spring clip for mobile scaffolding



Order no.: 027104

Height-adjustable spindle



Order no.: 027922

Swivel castor with spindle, non-marking grey



Order no.: 027921

Swivel castor with spindle, electrically conductive



Order no.: 027959

Swivel castor



Order no.: 027958

Swivel castor



Order no.: 027905

Push-fit frame, 0.75 m.



Order no.: 027902

Push-fit frame, 1.35 m.

## Corporate certifications

---

on sustainability criteria

