



Order no.: 170235

## Mobile scaffolding, 0.75 × 1.80 m

Platform height [mm]

2510

### Specification

Working height <b>4.51 m</b>	Scaffolding height <b>3.78 m</b>	Platform height <b>2.51 m</b>	Platform width <b>750 mm</b>	Platform length <b>1.8 m</b>
Load capacity <b>2 kN/m<sup>2</sup></b>	Weight <b>88 kg</b>	Indoor use, central installation <b>possible &amp; allowed</b>	Indoor use, lateral installation <b>not possible</b>	Outdoor use, central installation <b>possible &amp; allowed</b>
Outdoor use, lateral installation <b>not possible</b>	Ballasting of scaffolding, indoor, central installation <b>90 kg</b>	Ballasting of scaffolding, outdoor, central installation <b>350 kg</b>	Predecessor product <b>177235</b>	Business division <b>MUNK Günzburger Steigtechnik</b>
Article no. <b>170235</b>	Price <b>€ 2,549.00</b>	Notice <b>Accessories necessary to fulfil DIN EN 1004-1:2021</b>		

### Facts

- Mobile scaffolding made of sturdy round aluminium tubing with welded frame parts
- All scaffolding parts are also available individually as spare or extension parts
- Four Ø 200 mm swivel castors with centric load application, locking mechanisms and spindles

- Aluminium toe boards and railing frames with integrated knee board as safety railing
- Can be set up and dismantled without tools thanks to push-fit connections and quick-release fasteners
- Easy to handle thanks to individual lightweight parts
- Different platform lengths available (1.80 / 2.45 / 3.0 m)
- Working heights up to 12.45 m
- GS-tested as per DIN EN 1004
- Load class/scaffolding group 3: 2.0 kN/m<sup>2</sup>
- In order to meet the requirements of DIN EN 1004-1:2021, this scaffold must be retrofitted
- Option 1 - Conversion to MSG: 2 protective assembly railings telescopic (027991) are required for safe assembly, dismantling and conversion
- Option 2 - Conversion to SG: Replace the railings lengthwise with safety railings for mobile scaffoldings in the appropriate scaffold length (2 pieces per platform level). Replace the guardrail frame at the front (top platform level) with railing frame SG at the front in the appropriate width. Omit the diagonal braces above the first platform

### Scope of supply

- Push-fit frame, 0.75 m.: 2 x
- Railing lengthwise: 2 x
- Platform with trapdoor: 1 x
- Toe board front side: 2 x
- Toe board long side: 2 x
- Diagonal brace: 2 x
- Horizontal strut: 2 x
- Swivel castor with spindle: 4 x
- Step-on bracket: 1 x
- Instructions for assembly and use EN 1004-2 - de: 1 x
- Push-fit frame, 0.75 m.: 2 x

### Information on sustainability criteria

---

- Corporate certification: ISO 9001
- Corporate certification: EN 1090
- Corporate certification: EcoVadis
- RoHS
- REACH
- The MUNK Group complies with a Code of Conduct
- The Supply Chain Act does not apply due to our size
- The materials used are listed in the technical specification
- Resource-saving production: own photovoltaic systems
- Energy-efficient consumption during production: LED lighting
- Repairability, durability and quality: 15-year warranty on series products made in Germany
- Recyclability: Our products are mostly made of aluminium, steel or wood and can be fed directly into the recycling process.
- Socially acceptable working conditions in production: fair wages, gender equality
- Economical and recyclable packaging: no use of polystyrene, predominantly use of wood and cardboard, small amounts of plastic
- No health hazards for the users

## More product pictures

---



## Added value

---

### Safety at heights

- Optional protective assembly railing as safety railing during installation and removal
- Installation without the need of tools, uncomplicated and easy to handle
- Railing with integrated knee board and aluminium toe boards



### Highest quality

- User-friendly and robust design
- Low weight of the individual parts for easy handling
- Welded round tube frames for maximum stability
- All-round profiled rungs for safe ascent and descent



### Modular kit system

- More than 180 variants are possible by combining different individual parts
- Flexible adaptations and extensions possible at any time
- Individual parts at the original part price
- Installation and removal without tools



### Safe standing

- Adjustable outriggers with swing base or chassis bar ensure safe working depending on model
- Easy to handle
- Additional ballast weights required depending on application



### Sturdy connection

- Automatically closing scaffolding claw with sophisticated geometry for a secure connection
- Innovative spring clip for plug-on frame – no accidental loosening or losing possible
- Transverse and diagonal braces for high stability



### Flexible basis

- Swivel castors with load centring in braked condition
- Height adjustment for level compensation
- Various sizes and designs

















### Everything at a glance

- Clip tray for clearly visible attachment of the necessary test documents to the scaffolding
- Weather and UV-resistant



## Accessories

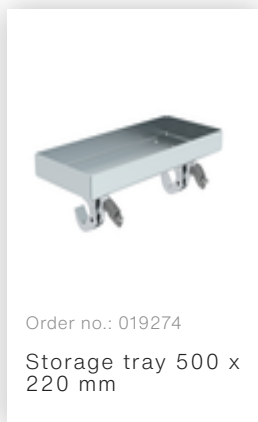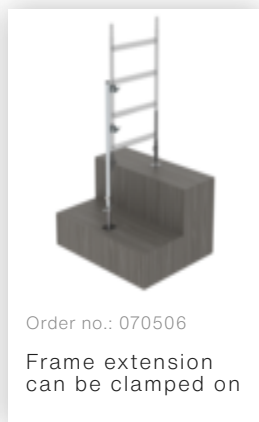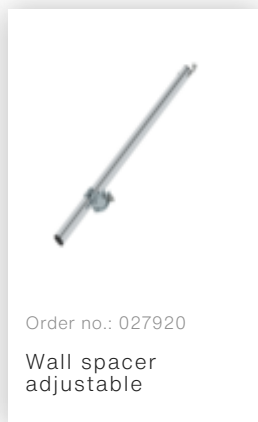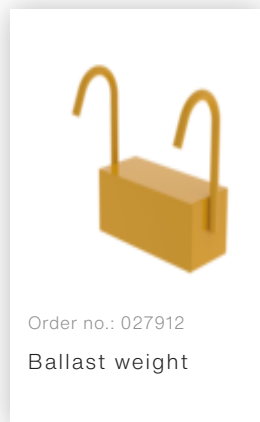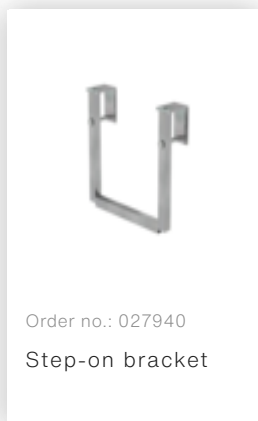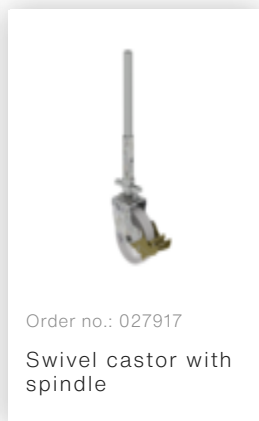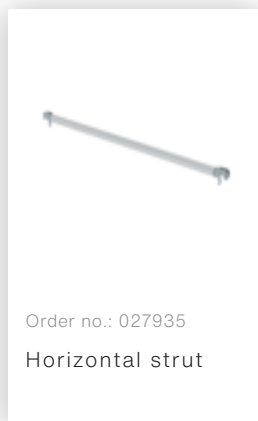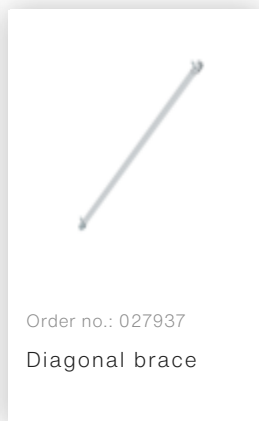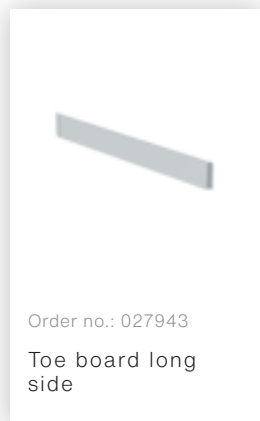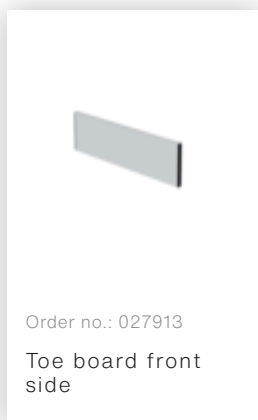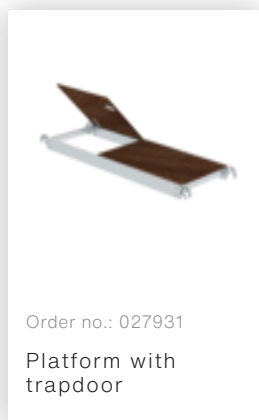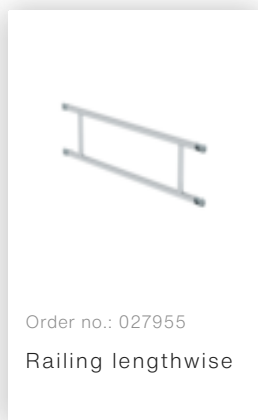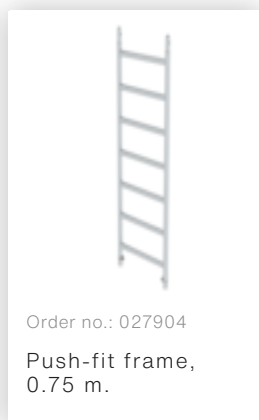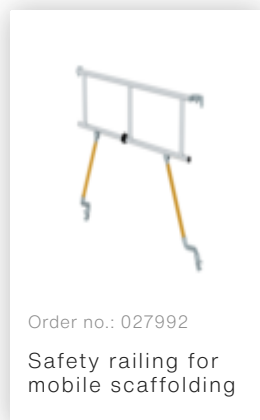



Order no.: 019276

Storage tray 800 x 300 mm



Order no.: 019175

Inspection sticker



Order no.: 019176

Inventory sticker



Order no.: 070507

Safety door on front side



Order no.: 070505

Scaffolding connector set



Order no.: 019136

Spring clip for mobile scaffolding



Order no.: 070524

Scaffolding strut telescopic



Order no.: 027104

Height-adjustable spindle



Order no.: 027922

Swivel castor with spindle, non-marking grey



Order no.: 027921

Swivel castor with spindle, electrically conductive



Order no.: 027958

Swivel castor



Order no.: 027905

Push-fit frame, 0.75 m.

## Corporate certifications

---

on sustainability criteria

