



Order no.: 510230

Multiple-flight vertical ladder with back protection (emergency ladder) bright aluminium

Climbing height [mm]

| | | | | |
|-------|-------|-------|-------|-------|
| 10920 | 11760 | 13160 | 14000 | 15120 |
| 15960 | 16800 | 17640 | 18760 | |

Specification

| | | | | |
|---|--|------------------------------|-------------------------------------|--|
| Climbing height 10.92 m | Ladder length incl. exit side-rail 12.12 m | Outer width 520 mm | Depth of side-rails 60 mm | Max. load capacity 150 kg |
| Intended use Emergency ladder systems | Design type Multiple-flight | Material Aluminium | Weight 98 kg | Business division MUNK Günzburger Steigtechnik |
| Article no. 510230 | Price € 3,696.00 | | | |

Facts

- Range of application: Emergency ladder systems are building structures that, in the event of danger, allow capable persons to rescue themselves or allow other persons to be rescued.
- Irrespective of the climbing height:
- Safety railing is not permitted for use as fall protection

- Always consult the relevant fire protection authority when planning emergency ladder systems and, in particular, access protection
- Proof of the load-bearing capacity of the underlying surface must be provided for each construction project by a responsible stability expert
- At unsecured exit points, railings attached to both sides of the vertical ladder or led into the exit level are required
- Gap at exit step must not be larger than 75 mm
- In case of potential drop heights of more than 1 m, holding devices have to be fitted on exits, entries and bridges
- For lateral bridging steps, the ladder sections must run at a higher level
- Step-on dimension: Distance between entry level and first rung: 100–400 mm; uppermost rung flush with the entry level
- The clearances between the vertical ladder system and the railing must not exceed 120 mm
- Release mechanism for emergency descent ladder via foot-operated lever or safety barrier
- A vertically movable ladder section is only permitted with the lowest section of ladder. This extendible ladder section must automatically drop into place before it is stood on. In the lowered state, the rungs of the extended ladder section and the lowest ladder section must be at the same height
- Access platforms must cover the entire access opening (e.g. window width) as access options on emergency ladder systems
- The vertical overlap of successive ladder flights must be at least 1,680 mm
- Climb-through openings inside balconies as well as access openings in balcony walls must be secured to prevent anyone from falling. The technical design must ensure that the function is permanently guaranteed

- The emergency vertical ladder should end in load-bearing and secured areas intended for escape routes leading out of the danger areas

Scope of supply

- Ladder section bright aluminium: 1 x
- Ladder section bright aluminium: 4 x
- Exit side-rail straight: 2 x
- Rigid wall anchor 200 mm, galvanised steel: 18 x
- Ø 700 mm back protection hoop: 8 x
- Back protection hoop strut, 3,000mm long: 19 x
- Back protection hoop offset design: 2 x
- Transfer platform between ladder sections, Ø 700 mm: 1 x
- Vertical ladder connector 200 mm: 6 x

Information on sustainability criteria

- Corporate certification: ISO 9001
- Corporate certification: EN 1090
- Corporate certification: EcoVadis
- RoHS
- REACH
- The MUNK Group complies with a Code of Conduct
- The Supply Chain Act does not apply due to our size
- The materials used are listed in the technical specification
- Resource-saving production: own photovoltaic systems
- Energy-efficient consumption during production: LED lighting
- Repairability, durability and quality: 15-year warranty on series products made in Germany
- Recyclability: Our products are mostly made of aluminium, steel or wood and can be fed directly into the recycling process.
- Socially acceptable working conditions in production: fair wages, gender equality
- Economical and recyclable packaging: no use of polystyrene, predominantly use of wood and cardboard, small amounts of plastic
- No health hazards for the users

More product pictures



Added value

Rational modular principle

- Prefabricated vertical ladders and the possibility of combining them yourself offer the right solution for every project
- The highly stable fastening technology of the important back protection increases the economic efficiency
- Each individual component in the modular kit system meets the same quality and efficiency requirements



Various material versions

- Depending on the application, vertical ladders made of galvanised steel, stainless steel, aluminium and anodised aluminium are available
- Wall anchors and other mounting materials are available in several materials
- Robust, durable, efficient



Mounting and fastening

- Thanks to the optimised assembly system, even complex and multiple-flight systems can be assembled with up to 30 percent time savings
- For ready-made vertical ladders, the appropriate mounting sets are already included, the modular kit system offers numerous fastening options (please also order)
- Adjustable wall anchors for complex façades or walls with full thermal insulation



Safely to your destination

- Convenient platforms for rest breaks or easy changeover with staggered vertical ladders
- Exits and access ladders for safe ascent and descent
- Lockable doors, wall anchors and other accessories for different structural conditions



Optimum planning

- Practical planning aids (available as [Downloads](#)) with tips for correct planning of vertical ladder systems
- Planning in close coordination with the client as well as the place and purpose of use
- Joint project planning



All [fixed ladders / vertical ladders](#) at a glance:

- [Single-flight vertical ladders](#) in accordance with DIN 18799-1/-3, DIN 14094-1 and DIN EN ISO 14122-4 (depending on the choice of standard and the situation on site at the exit, additional components such as exit steps, railings and safety doors may be required)
- DIN 18799-1: Stationary multiple-flight vertical ladders [on buildings](#)
- DIN 14094-1: Multiple-flight [emergency ladder systems \(emergency ladders\)](#).
- DIN EN ISO 14122-4: Stationary multiple-flight vertical ladders [on machinery](#)

Accessories



Order no.: 062264
Ladder section
bright aluminium



Order no.: 062265
Ladder section
bright aluminium



Order no.: 062243
Exit side-rail
straight



Order no.: 063249
Rigid wall anchor
200 mm,
galvanised steel



Order no.: 062234
Ø 700 mm back
protection hoop



Order no.: 062235
Back protection
hoop strut,
3,000mm long



Order no.: 062963
Back protection
hoop offset design



Order no.: 063961
Transfer platform
between ladder
sections, Ø 700
mm



Order no.: 061236
Vertical ladder
connector 200 mm



Order no.: 068239
Connecting brace



Order no.: 063257
Wall anchor U-
bracket, rigid



Order no.: 063259
Wall anchor U-
bracket, rigid




Order no.: 063263
Wall anchor U-
bracket,
adjustable, 165-
205 mm,
galvanised steel




Order no.: 063260
Wall anchor U-
bracket,
adjustable, 200-
275 mm,
galvanised steel




Order no.: 063267
Wall anchor U-
bracket,
adjustable, 275-
375mm,
galvanised steel




Order no.: 063275
Wall anchor U-bracket, adjustable, 375-500 mm, galvanised steel




Order no.: 063250
Wall anchor, adjustable, 165-205 mm, galvanised steel




Order no.: 063262
Wall anchor w. Clamping bracket, adjustable, 215-275 mm, galvanised steel




Order no.: 063261
Wall anchor w. clamping bracket, adjustable 275-375 mm, galvanised steel




Order no.: 063269
Wall anchor w. clamping bracket, adjustable 375-500 mm, galvanised steel




Order no.: 063270
Special wall bracket, adjustment range 500-600mm, galvanised steel




Order no.: 063271
Special wall bracket, adjustment range 600-700mm, galvanised steel




Order no.: 063272
Special wall bracket, adjustment range 700-800mm, galvanised steel




Order no.: 063273
Special wall bracket, adjustment range 800-900mm, galvanised steel




Order no.: 077059
Fall protection rail 1,40m with aluminium connecting strap




Order no.: 077058
Climbing protection rail 1.96m with aluminium connecting bracket




Order no.: 077057
Climbing protection rail 2.80m with aluminium connecting bracket



Order no.: 062049
Exit side-rail angled



Order no.: 062050
Exit side-rail with railing attachment



Order no.: 063253
Ground attachment for base plate



Order no.: 062183

Roof parapet bridge bright aluminium special length



Order no.: 062184

Roof parapet bridge bright aluminium special length



Order no.: 062185

Roof parapet bridge bright aluminium special length



Order no.: 063502

Safety doors without fall protection rail



Order no.: 062966

Exit step bright aluminium



Order no.: 062967

Exit step bright aluminium



Order no.: 062968

Exit step bright aluminium



Order no.: 062969

Exit step bright aluminium



Order no.: 062970

Exit step bright aluminium



Order no.: 062237

Back protection hoop lateral exit



Order no.: 062277

Back protection extension



Order no.: 062446

Access guard emergency exit ladder



Order no.: 063504

Safety barrier for emergency descent ladder











Order no.: 063505

Safety barrier for emergency descent ladder



Order no.: 063962

Rotating access protection unit

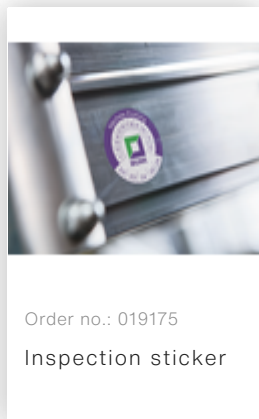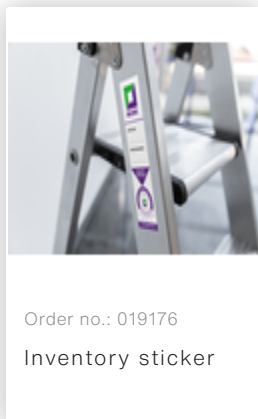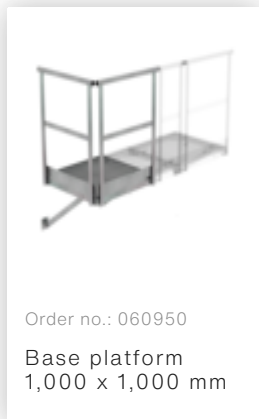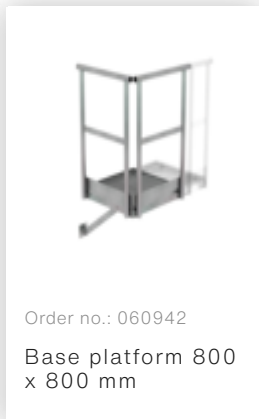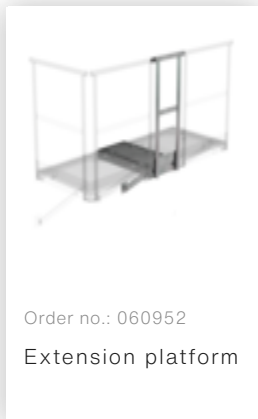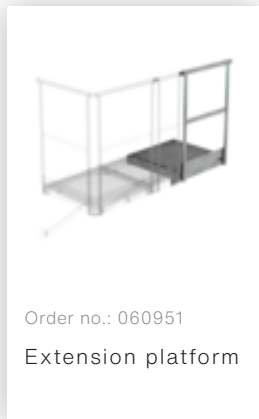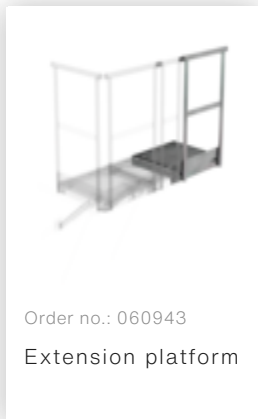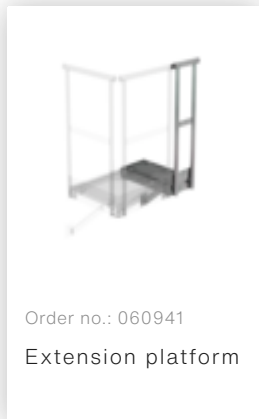

Corporate certifications

on sustainability criteria

