


Order no.: 116104

## Scaling ladder connecting section ÖNORM F 4047

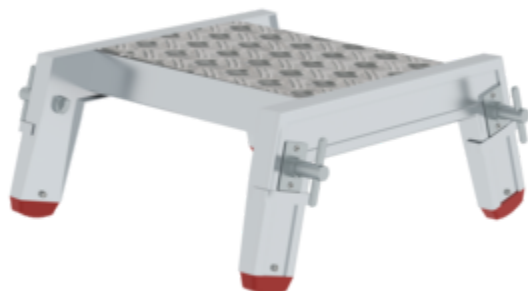

### Specification

Ladder feet <b>Ladder shoe</b>	Max. load capacity <b>300 kg</b>	Persons max. <b>2</b>	Material <b>Aluminium</b>	Weight <b>5.2 kg</b>
Transport dimensions <b>535 x 569 x 232 mm, 5.5 kg</b>	Business division <b>MUNK Rettungstechnik</b>	Article no. <b>116104</b>		

### Facts

- Scaling ladder connecting section made of aluminium
- Suitable for aluminium scaling ladders
- For creating a double-sided ladder or a provisional hose conveyance
- Secure push-fit connections with spring-loaded locking pin
- Surface of the platform made of aluminium chequered plate, approx. 310 x 260 mm
- With integrated eye for attaching a snap hook or shackle
- Corrosion-resistant fixtures made of galvanised steel

- Non-slip and replaceable ladder shoes
- Permissible load: 300 kg

## Information on sustainability criteria

---

- Corporate certification: ISO 9001
- Corporate certification: EN 1090
- Corporate certification: EcoVadis
- RoHS
- REACH
- The MUNK Group complies with a Code of Conduct
- The Supply Chain Act does not apply due to our size
- The materials used are listed in the technical specification
- Resource-saving production: own photovoltaic systems
- Energy-efficient consumption during production: LED lighting
- Repairability, durability and quality: 15-year warranty on series products made in Germany
- Recyclability: Our products are mostly made of aluminium, steel or wood and can be fed directly into the recycling process.
- Socially acceptable working conditions in production: fair wages, gender equality
- Economical and recyclable packaging: no use of polystyrene, predominantly use of wood and cardboard, small amounts of plastic
- No health hazards for the users

## More product pictures

---



## Spare parts

---



Order no.: 820001

Inside shoe, FS  
ladder DIN EN  
1147 and ÖNORM  
F4047



Order no.: 820007

Scaling ladder  
lock ÖNORM  
F4047

## Corporate certifications

---

on sustainability criteria

