

Order no.: 052705

Folding platform ladder with narrow undercarriage



Number of steps

- 5
- 6
- 7
- 8
- 10
- 12
- 14

Specification

| | | | | |
|---|--|---|--|--|
| Working height 3.15 m | Step design Steps | Number of steps/rungs 5 steps | Platform included as step Yes | Platform height 1.15 m |
| Platform length 650 mm | Platform width 600 mm | Step depth 80 mm | Step/Rung distance 235 mm | Height 2.19 m |
| Total length folded 2.75 m | Base spread 1.4 m | Inclination 70 ° | Outer width 650 mm | Stabiliser width 850 mm |
| Depth of side-rails 73 mm | Depth of side-rails, support 58 mm | Max. load capacity 150 kg | Design type Single-sided access Freestanding With chassis beam | Ballast weight 30 kg |
| Weight incl. ballast weight 67 kg | Weight 66.5 kg | Transport dimensions 2780 x 760 x 220 mm, 29 kg | Transport dimensions 2 860 x 220 x 262 mm, 37.5 kg | Business division MUNK Günzburger Steigtechnik |
| Order no. 052705 | Price € 2,313.00 | | | |

Facts

- Platform ladder made of aluminium

- Stable rectangular tube side-rails
- Grooved steps with a depth of 80 mm
- Spacious platform with grooves for secure footing (650 x 600 mm)
- 4-fold edged step-to-side-rail connection
- With handrail on both sides, 3-sided, 1,000 mm high railing with knee and foot rails as well as safety rope
- Support part with narrow undercarriage and ballast weight for high stability
- Folds for compact storage thanks to sturdy steel hinges (when ballast weight is on the outside)
- Particularly suitable for narrow shelving aisles etc.
- Integrated Ø 125 mm fixed castors with locking device for quick transportation when folded out
- nivello® ladder shoes with patented 2-axis inclination technology
- Generous sized tool tray
- Outer width: 650 mm (without stabiliser)
- Step spacing: 235 mm
- Ladder inclination: 70°
- Maximum load: 150 kg

Scope of supply


- Ladder: 1 x
- Instructions for use and operation: 1 x

Information on sustainability criteria

- Corporate certification: ISO 9001
- Corporate certification: ISO 14001
- Corporate certification: EN 1090
- Corporate certification: EcoVadis

- RoHS
- REACH
- The MUNK Group complies with a Code of Conduct
- The Supply Chain Act does not apply due to our size
- The materials used are listed in the technical specification
- Resource-saving production: own photovoltaic systems
- Energy-efficient consumption during production: LED lighting
- Repairability, durability and quality: 15-year warranty on series products made in Germany
- Recyclability: Our products are mostly made of aluminium, steel or wood and can be fed directly into the recycling process.
- Socially acceptable working conditions in production: fair wages, gender equality
- Economical and recyclable packaging: no use of polystyrene, predominantly use of wood and cardboard, small amounts of plastic
- No health hazards for the users

More product pictures

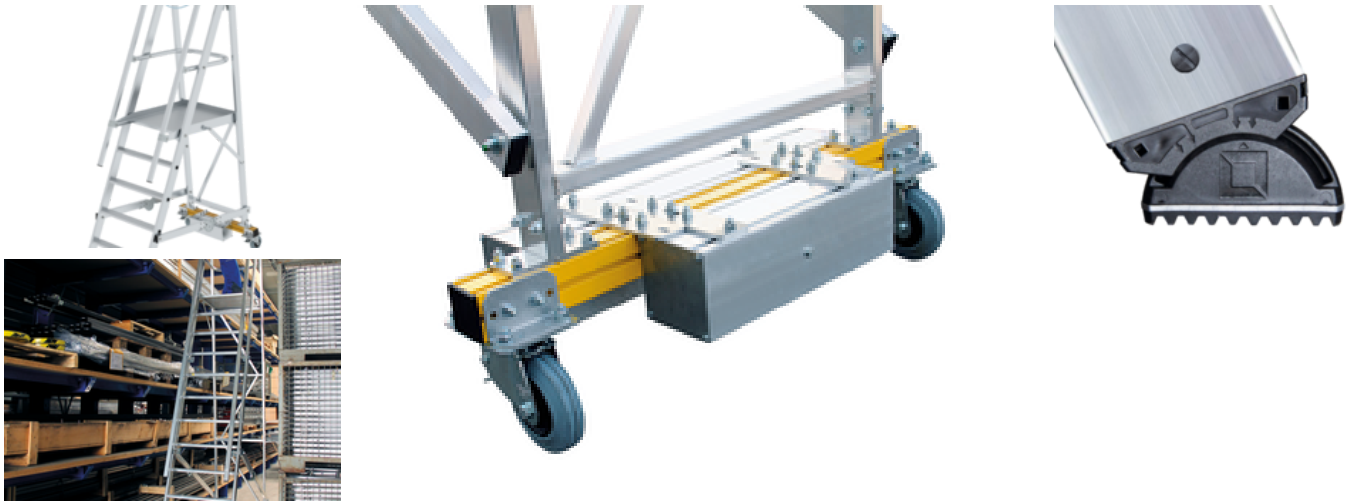

Added value

Safe working

- Handrails for safe ascent and descent
- Large-format, non-slip platforms
- Conical side-rail guide for safe stance
- Railings and knee boards for safe access and stance



The movable ladder shoe sets new standards in stability

[Learn more](#)



Industrial grade

Stable and robust for tough everyday working life (including 4-way edging)

- Corrosion-resistant fixtures
- Use of high-quality and high-strength materials
- Versatile and practical accessories



Castors

- Ergonomic and comfortable handling
- Simple movement from place to place



Certificates



5011053.24002 -
Certificate Product
Safety Type
approved

Valid in



DIN EN 131-7:2013
DIN EN 131-3:2018

Corporate certifications

on sustainability criteria



Management System
ISO 9001:2015
ISO 14001:2015
www.tuv.com
ID 9108612548

