



Order no.: 042703

## Single-sided stepladder 250 kg with clip-step R13



Number of steps

- 3
  4
  5
  6
  7
  8

### Specification

Working height <b>2.7 m</b>	Step design <b>Steps</b>	Number of steps/rungs <b>3 steps</b>	Platform included as step <b>Yes</b>	Step depth <b>80 mm</b>
Step/Rung distance <b>235 mm</b>	Type of non-slip protection <b>clip-step R13</b>	Height <b>1.34 m</b>	Platform height <b>670 mm</b>	Base spread <b>700 mm</b>
Inclination <b>70 °</b>	Lower outer width <b>470 mm</b>	Depth of side-rails <b>73 mm</b>	Depth of side-rails, support <b>58 mm</b>	Width of side-rails <b>25 mm</b>
Max. load capacity <b>250 kg</b>	Design type <b>Freestanding   Single-sided access</b>	Weight <b>6 kg</b>	Transport dimensions <b>1430 x 463 x 165 mm, 6 kg</b>	Business division <b>MUNK Günzburger Steigtechnik</b>
Article no. <b>042703</b>	Price <b>€ 245.00</b>			

### Facts

- Step ladder made of aluminium
- Stable rectangular tube side-rails

- 80 mm deep grooved steps and large platform
- clip-step R13 step padding for certified non-slip protection
- 4-fold edged step-to-side-rail connection
- Conical side-rail guide for safe stance
- nivello® ladder shoes with patented 2-axis inclination technology
- ergo-pad® grip area with clamping mechanism
- 'safe-cap' ladder joint
- Practical storage tray with integrated hooks and tool holders
- From five steps or more: Spreader lock with two high-strength polyester straps
- Step spacing: 235 mm
- Ladder inclination: 70°
- Maximum load: 250 kg

### **Scope of supply**

- Ladder: 1 x

### **Information on sustainability criteria**

---

- Corporate certification: ISO 9001
- Corporate certification: EN 1090
- Corporate certification: EcoVadis
- RoHS
- REACH
- The MUNK Group complies with a Code of Conduct
- The Supply Chain Act does not apply due to our size
- The materials used are listed in the technical specification
- Resource-saving production: own photovoltaic systems

- Energy-efficient consumption during production: LED lighting
- Repairability, durability and quality: 15-year warranty on series products made in Germany
- Recyclability: Our products are mostly made of aluminium, steel or wood and can be fed directly into the recycling process.
- Socially acceptable working conditions in production: fair wages, gender equality
- Economical and recyclable packaging: no use of polystyrene, predominantly use of wood and cardboard, small amounts of plastic
- No health hazards for the users

## More product pictures

---



## Added value

---

### Industrial grade

Stable and robust for tough everyday working life (including 4-way edging)

- Corrosion-resistant fixtures
- Use of high-quality and high-strength materials
- Versatile and practical accessories



### Ladder joint safe-cap

- Smooth ladder joint with large contact surface and sturdy plastic protective cap
- The 6 rivets and thicker wall thickness provide for greater stability and protection at this sensitive point on the ladder, increasing its service life
- The safe-cap protects the ladder when in use, when loading and storing, as well as the contact surfaces, walls, truck loading areas and the joint itself



### Storage tray

- For the practical storage of small parts
- Made from high-quality plastic
- Partly with integrated hooks and tool holders
- Different versions, depending on the ladder model



The movable ladder shoe sets new standards in stability


[Learn more](#)



### clip-step R 13 step padding


Certified non-slip protection for step ladders

- Fulfils the requirements of the highest possible non-slip class R 13 thanks to aluminium oxide particles
- Improves work safety in wet and oil-contaminated environments
- Applied up to the maximum accessible step as a visual check
- Retrofittable, available as a spare part and also in yellow in selected lengths (RAL 1021)



### Note: Working heights

- National regulations (e.g. TRBS 2121 Part 2 in Germany) must be complied with with regard to the maximum working height when using the ladder as a workstation.
- Information on [TRBS 2121 Part 2](#) has been summarised on our Service page
- Read our [tips and tricks](#) on how to calculate [working height](#)


















### ergo-pad® grip area

For easier and more ergonomic handling at the optimum carrying point



## Accessories

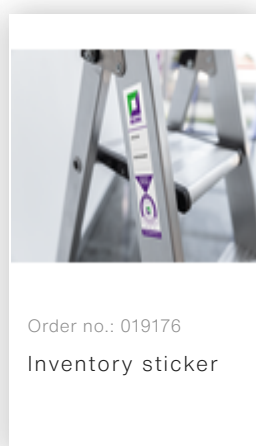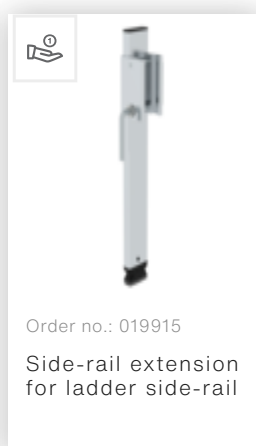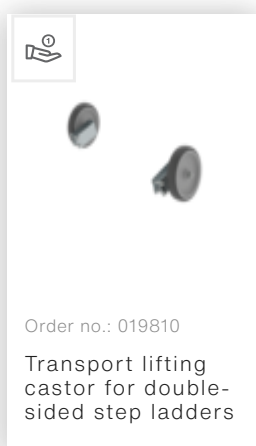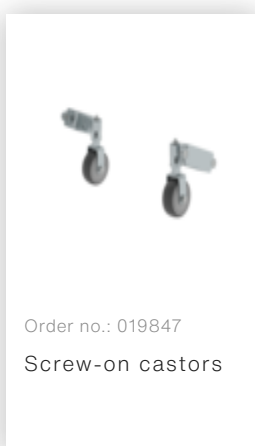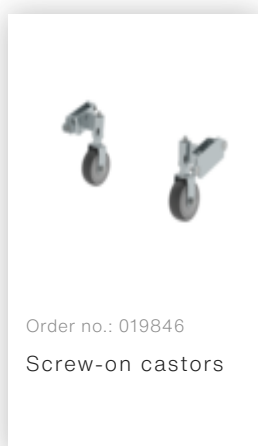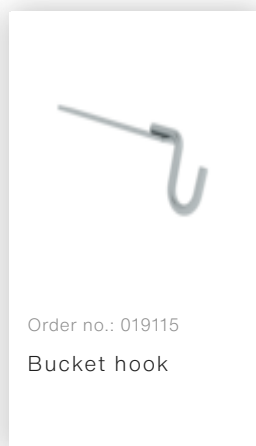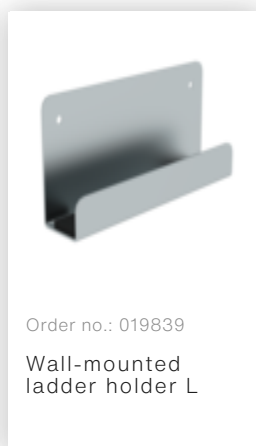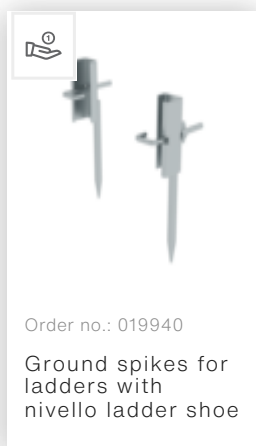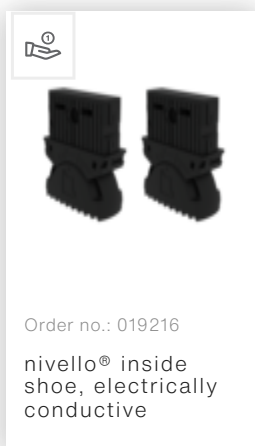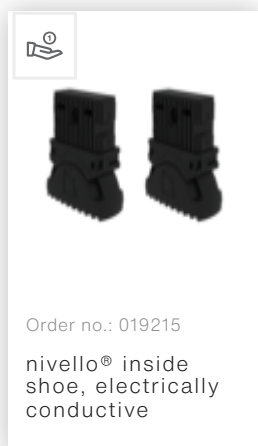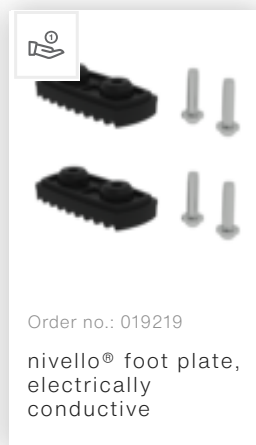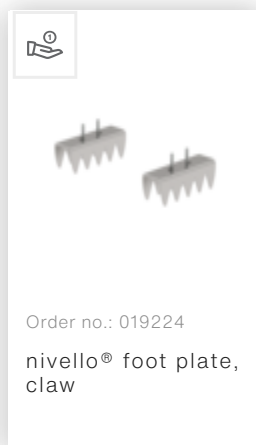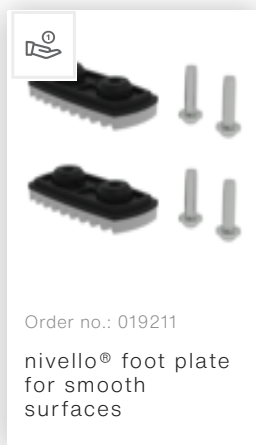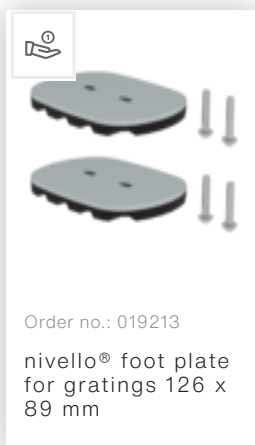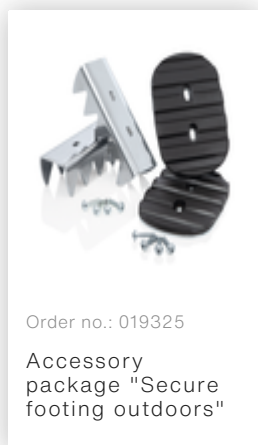



Order no.: 019175  
Inspection sticker

## Spare parts



Order no.: 019205  
nivello® inside shoe



Order no.: 019206  
nivello® inside shoe



Order no.: 019209  
nivello® foot plate, standard



Order no.: 019051  
ergo-pad® grip area type 1



Order no.: 019152  
Information sticker for double-sided ladders 250 kg with single-sided access



Order no.: 019412  
Corner strut for aluminium double-sided step ladders.



Order no.: 019845  
Storage tray for double-sided step ladder



## Certificates



16KFP1766-03 -  
Test Certificate  
"Bauart geprüft"

Valid in



DIN EN 131-  
3:2007  
EK5-AK1 17-  
02:2017  
DIN EN 131-1:2016  
DIN EN 131-2:2017  
PAK-  
ANFORDERUNG  
FÜR GS -  
ABSCHNITT  
3.1(PAH-  
REQUIREMENT  
FOR GS - CL. 3.1)  
AFPS GS 2014:01  
PAK

## Corporate certifications

---

on sustainability criteria

