

Order no.: 301310

## Spindle winches for tanker ladder



### Specification

Weight <b>6.5 kg</b>	Transport dimensions <b>870 x 225 x 150 mm, 6.5 kg</b>	Business division <b>MUNK Günzburger Steigtechnik</b>	Article no. <b>301310</b>	Price <b>€ 2,550.00</b>
-------------------------	---	--	------------------------------	----------------------------

### Facts

- For compensation of uneven ground and partial raising of the tanker ladder
- Ergonomic crank handle for effortless winding
- Efficient solution for height adjustment and stability
- 1 set = 2 spindle winches

#### Scope of supply

- Spindle winche: 2 x


### Information on sustainability criteria

- Corporate certification: ISO 9001

- Corporate certification: EN 1090
- Corporate certification: EcoVadis
- RoHS
- REACH
- The MUNK Group complies with a Code of Conduct
- The Supply Chain Act does not apply due to our size
- The materials used are listed in the technical specification
- Resource-saving production: own photovoltaic systems
- Energy-efficient consumption during production: LED lighting
- Repairability, durability and quality: 15-year warranty on series products made in Germany
- Recyclability: Our products are mostly made of aluminium, steel or wood and can be fed directly into the recycling process.
- Socially acceptable working conditions in production: fair wages, gender equality
- Economical and recyclable packaging: no use of polystyrene, predominantly use of wood and cardboard, small amounts of plastic
- No health hazards for the users

## More product pictures

---

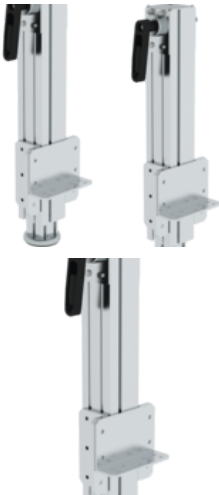

## Added value

---

### Industrial grade

Stable and robust for tough everyday working life (including 4-way edging)

- Corrosion-resistant fixtures
- Use of high-quality and high-strength materials
- Versatile and practical accessories



### Large range of accessories

- The right equipment for every application
- Practical and makes work easier
- Suitable for universal use on Günzburger Steigtechnik ladders



## Corporate certifications

---

on sustainability criteria

