



Order no.: 011609

## Rung push-up extension ladder with standard stabiliser



Number of rungs

**2x9**

2x11

2x13

2x15

2x17

### Specification

Working height <b>5.7 m</b>	Step design <b>Rungs</b>	Number of steps/rungs <b>2x 9 rungs</b>	Step/Rung height <b>30 mm</b>	Step depth <b>30 mm</b>
Step/Rung distance <b>280 mm</b>	Retracted length <b>2.8 m</b>	Extended length <b>4.6 m</b>	Outer width <b>420 mm</b>	Stabiliser width <b>930 mm</b>
Depth of side-rails <b>73 mm</b>	Width of side-rails <b>25 mm</b>	Design type <b>To lean against   2-part</b>	Weight <b>12.5 kg</b>	Transport dimensions <b>2750 x 425 x 150 mm, 12.5 kg</b>
Business division <b>MUNK Günzburger Steigtechnik</b>	Article no. <b>011609</b>	Price <b>€ 308.00</b>		

### Facts

- Rung push-up extension ladder made of aluminium
- Stable rectangular tube side-rails
- Rectangular rungs grooved on both sides, 30 x 30 mm
- 4-fold edged rung-to-side-rail connection

- Simple height adjustment from rung to rung thanks to insertion hook with automatically engaging lift-off protection
- Upper ladder from size 2x14 rungs with wall castors
- Corrosion-resistant guide fixtures
- Upper ladders up to 3.0 m with nivello® ladder shoes
- Rung distance: 280 mm
- Ladder width: 420 mm (without stabiliser)
- Maximum load: 150 kg
- Standard stabiliser with non-slip ladder shoes with optimum width for the selected product. Ensures maximum stability and safe ascent for straight ladders over 3.0 m. The stabiliser is enclosed separately and is screwed to the lower end of the rail in two places
- Note: In accordance with standards, the attached push-up extension ladder section cannot be separated from the ladder with lengths over 3.0 m

### Scope of supply

- Ladder: 1 x
- Stabiliser (enclosed separately): 1 x
- Instructions for use and operation: 1 x

### Information on sustainability criteria

- Corporate certification: ISO 9001
- Corporate certification: EN 1090
- Corporate certification: EcoVadis
- RoHS
- REACH
- The MUNK Group complies with a Code of Conduct
- The Supply Chain Act does not apply due to our size

- The materials used are listed in the technical specification
- Resource-saving production: own photovoltaic systems
- Energy-efficient consumption during production: LED lighting
- Repairability, durability and quality: 15-year warranty on series products made in Germany
- Recyclability: Our products are mostly made of aluminium, steel or wood and can be fed directly into the recycling process.
- Socially acceptable working conditions in production: fair wages, gender equality
- Economical and recyclable packaging: no use of polystyrene, predominantly use of wood and cardboard, small amounts of plastic
- No health hazards for the users

## More product pictures

---



## Added value

---

### Industrial grade

Stable and robust for tough everyday working life (including 4-way edging)

- Corrosion-resistant fixtures
- Use of high-quality and high-strength materials
- Versatile and practical accessories



### Large range of accessories

- The right equipment for every application
- Practical and makes work easier
- Suitable for universal use on Günzburger Steigtechnik ladders



Optimum and smooth operation, thanks to easily accessible elements

- Simple height adjustment from rung to rung or from step to step
- Wall wheels on the upper part (from 14 rungs or more)
- Fittings with sliding guides
- Smooth-running rope pulley



### Standard stabiliser

Safe, standards-compliant ascent for straight ladders over 3.0 m

- Different stabiliser widths, suitable for the selected ladder length
- Non-slip ladder shoes
- Individually available as spare part




### **roll-bar retrofit kit**


- Rolling instead of carrying: ergonomic and convenient handling
- Simple, no-drill mounting on stabilisers
- User-friendly operation without bending down




## Accessories




Order no.: 019326  
Accessory package "TRBS kit"




Order no.: 019324  
Accessory package "Secure footing"




Order no.: 019329  
Accessory package "Ergonomics"




Order no.: 019328  
Accessory package "Practical aids 2"




Order no.: 019309  
Accessory package "Ladder head protection, complete set"




Order no.: 019315  
Ladder head protection




Order no.: 019316  
Ladder head protection




Order no.: 019317  
Ladder head protection




Order no.: 019319  
Ladder head protection, gutter




Order no.: 019318  
Ladder head protection, beam




Order no.: 040344  
Ladder head protection, magnet




Order no.: 019310  
Ladder head protection, rung and step hole


















Order no.: 019311  
Ladder head protection, rung and step hole



Order no.: 019312  
Ladder head protection, rung and step hole



Order no.: 019634  
'roll-bar' retrofit kit

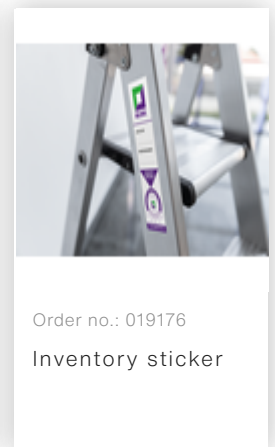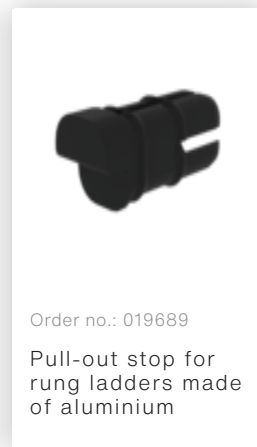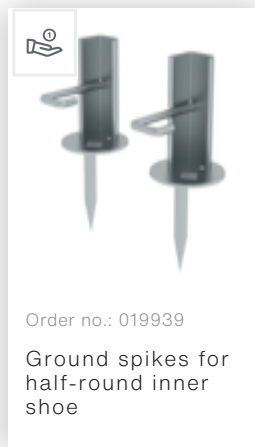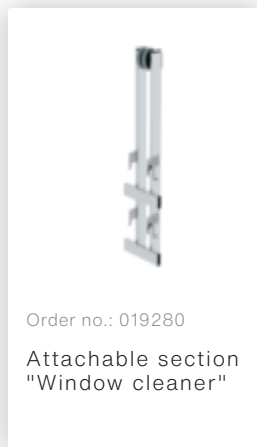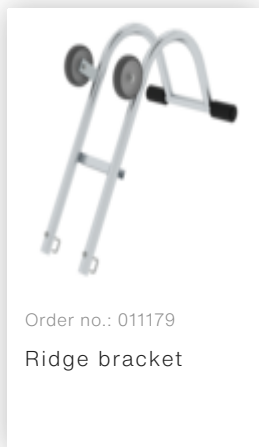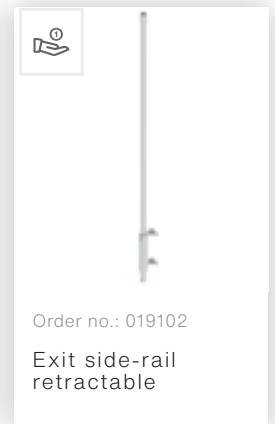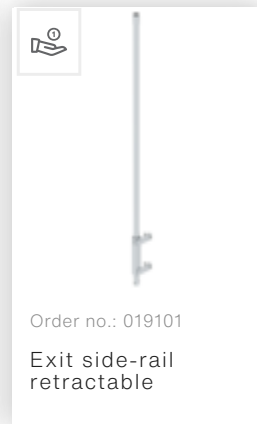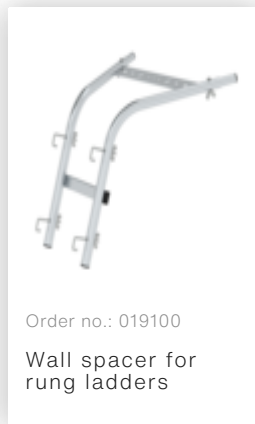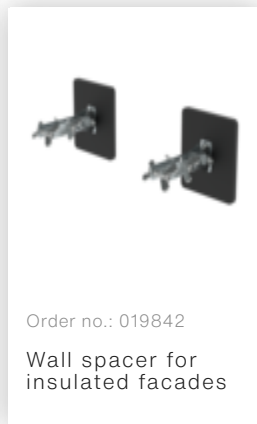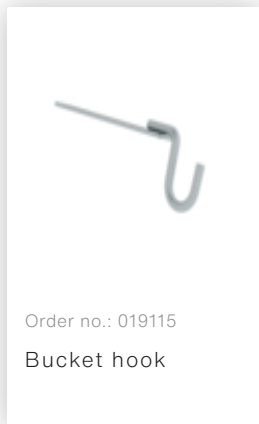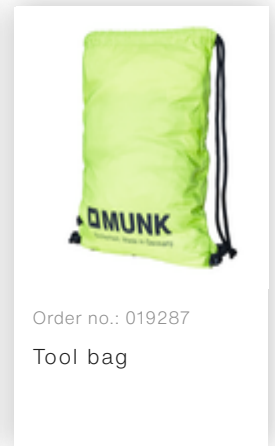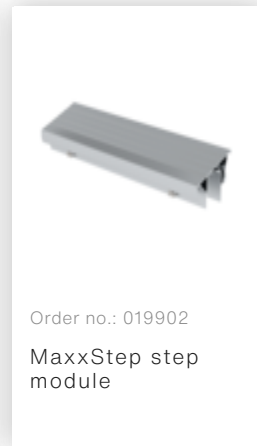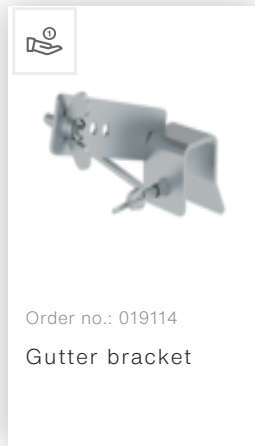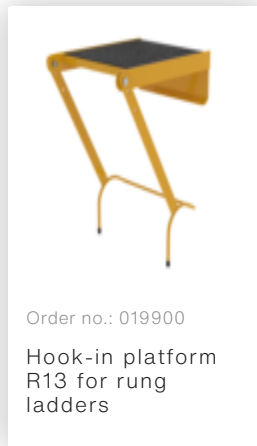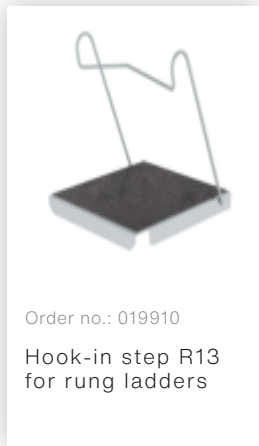



Order no.: 019175

Inspection sticker



Order no.: 030296

Push-fit handrail for rung/step spacing 280/263 mm



Order no.: 030297

Push-fit handrail for rung/step spacing 280/263 mm



Order no.: 019254

Guide fixture, upper, for push-up extension, rope-extension and multi-purpose ladders

## Spare parts



Order no.: 019632

Stabiliser complete



Order no.: 019199

Outside shoe for cross-tube



Order no.: 019144

Information stickers for push-up extension and rope-extension ladders over 3 m



## Certificates

---



17KFP1533-03 -  
Test Certificate  
"Bauart geprüft"

Valid in



DIN EN 131-  
3:2007  
PAK-  
ANFORDERUNG  
FÜR GS -  
ABSCHNITT  
3.1(PAH-  
REQUIREMENT  
FOR GS - CL. 3.1)  
AFPS GS 2014:01  
PAK  
EK5/AK1 17-1:2017  
DIN EN 131-1:2016  
DIN EN 131-2:2017

## Corporate certifications

---

on sustainability criteria

