



Order no.: 111003

## Scaling ladder push-fit section DIN EN 1147, photoluminescent

Rung covering

Glow (yellow luminescent)

Standard (red)

### Specification

|  |  |                              |   |                                     |
|--|--|------------------------------|---|-------------------------------------|
| Ladder length<br><b>780 mm</b>                             | Ladder length, 4<br>scaling ladders<br><b>8.4 m</b>  | Outer width<br><b>485 mm</b> | Ladder feet<br><b>Ladder shoe</b>                     | Depth of side-rails<br><b>74 mm</b> |
| Width of side-rails<br><b>35 mm</b>                        | Step/Rung height<br><b>28 mm</b>                     | Step depth<br><b>29 mm</b>   | Number of steps/rungs<br><b>2 rungs</b>               | Step/Rung distance<br><b>273 mm</b> |
| Max. load capacity<br><b>216 kg</b>                        | Persons max.<br><b>2</b>                             | Material<br><b>Aluminium</b> | Rung covering<br><b>Glow (yellow<br/>luminescent)</b> | Weight<br><b>3 kg</b>               |
| Transport dimensions<br><b>84 x 488 x 754<br/>mm, 2 kg</b> | Business division<br><b>MUNK<br/>Rettungstechnik</b> | Order no.<br><b>111003</b>   |   |                                     |

### Facts

- Rescue ladder compliant with DIN EN 1147
- Made of aluminium
- Secure push-fit connections with spring-loaded locking pin
- Conical side-rail guide for safe stance
- Permissible load: 216 kg / 2 people

- Corrosion-resistant fixtures made of galvanised steel
- Side-rails and rungs made of high-strength aluminium
- With yellow luminescent, heat-insulating and non-slip plastic covering
- 4-fold edged rung-to-side-rail connection
- Non-slip and replaceable ladder shoes



## Information on sustainability criteria

---

- Corporate certification: ISO 9001
- Corporate certification: EN 1090
- Corporate certification: EcoVadis
- RoHS
- REACH
- The MUNK Group complies with a Code of Conduct
- The Supply Chain Act does not apply due to our size
- The materials used are listed in the technical specification
- Resource-saving production: own photovoltaic systems
- Energy-efficient consumption during production: LED lighting
- Repairability, durability and quality: 15-year warranty on series products made in Germany
- Recyclability: Our products are mostly made of aluminium, steel or wood and can be fed directly into the recycling process.
- Socially acceptable working conditions in production: fair wages, gender equality
- Economical and recyclable packaging: no use of polystyrene, predominantly use of wood and cardboard, small amounts of plastic
- No health hazards for the users

## More product pictures

---

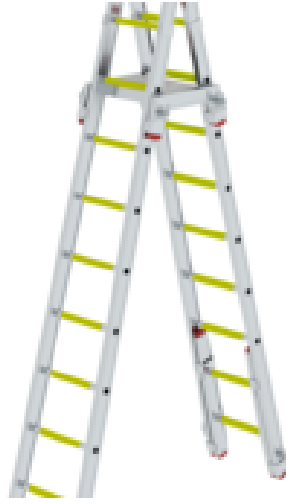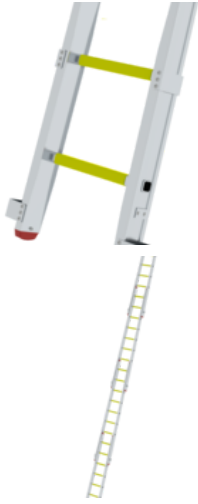

## Corporate certifications

---

on sustainability criteria



Management System  
ISO 9001:2015  
ISO 14001:2015  
[www.tuv.com](http://www.tuv.com)  
ID 9108612548

