

Order no.: 011159

## Roof hooks for pantiles and single-hip tiles anthracite grey



Model versions

Anthracite grey powder-coated

Brown powder-coated

Red powder-coated

Red-brown powder-coated

Galvanised steel

### Specification

|  |                          |   |  |                              |
|--|--------------------------|---|--|------------------------------|
| Colour version<br><b>Anthracite grey<br/>powder-coated</b> | Weight<br><b>1.06 kg</b> | Transport dimensions<br><b>450 x 210 x 30 mm,<br/>1.06 kg</b> | Business division<br><b>MUNK Günzburger<br/>Steigtechnik</b> | Article no.<br><b>011159</b> |
| Price<br><b>€ 21.00</b>                                    |                          |   |  |                              |

### Facts

- Delivery includes with grooved nails
- Coloured hooks are hot-dip galvanised and powder-coated
- To be mounted centrally on the rafters
- At least two hooks are needed for the first ladder and at least one hook is needed for each additional ladder
- Complies with Construction Products Ordinance (BauPVO) 305/2011 (EU) and DIN EN 517

- Safety roof hooks in accordance with DIN EN 517 must be installed on roofs with an inclination of 22.5° to 75°. They must be distributed over the roof surface as follows:
- Upper row &lt; 1.0 m below the ridge
- Intermediate rows in each case &lt; 5.0 m distance from the row above
- Lower row &lt; 1.5 m above the eaves, in each case measured in the roof pitch
- The horizontal distance between the safety hooks of a row must not exceed 2.0 m. To be used for eaves heights above 3.0 m

### Scope of supply

- Roof hooks: 1 x
- Assembly instructions and instructions for use: 1 x

### Information on sustainability criteria

---

- Corporate certification: ISO 9001
- Corporate certification: EN 1090
- Corporate certification: EcoVadis
- RoHS
- REACH
- The MUNK Group complies with a Code of Conduct
- The Supply Chain Act does not apply due to our size
- The materials used are listed in the technical specification
- Resource-saving production: own photovoltaic systems
- Energy-efficient consumption during production: LED lighting
- Repairability, durability and quality: 15-year warranty on series products made in Germany
- Recyclability: Our products are mostly made of aluminium, steel or wood and can be fed directly into the recycling process.
- Socially acceptable working conditions in production: fair wages, gender equality
- Economical and recyclable packaging: no use of polystyrene, predominantly use of wood and cardboard, small amounts of plastic

- No health hazards for the users

## More product pictures

---



## Added value

---

### Industrial grade


Stable and robust for tough everyday working life (including 4-way edging)

- Corrosion-resistant fixtures
- Use of high-quality and high-strength materials
- Versatile and practical accessories



## Accessories

---

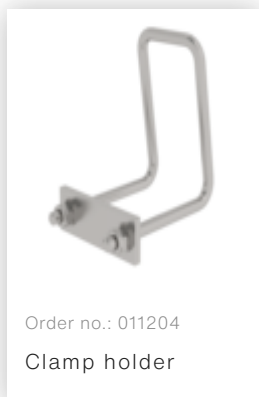

## Corporate certifications

---

on sustainability criteria

